

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000633

International filing date: 21 February 2005 (21.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0404196.8
Filing date: 25 February 2004 (25.02.2004)

Date of receipt at the International Bureau: 13 April 2005 (13.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/GB 2005 / 0 0 0 6 3 3



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed

Stephen Hordley


Dated 21 March 2005



**Patent
Office**

26FEB04 E876142-1 D03052
POL/T700 0.00-0404196.8 ACEDUNT CHA

Patent Act 1977
(Rule 16)

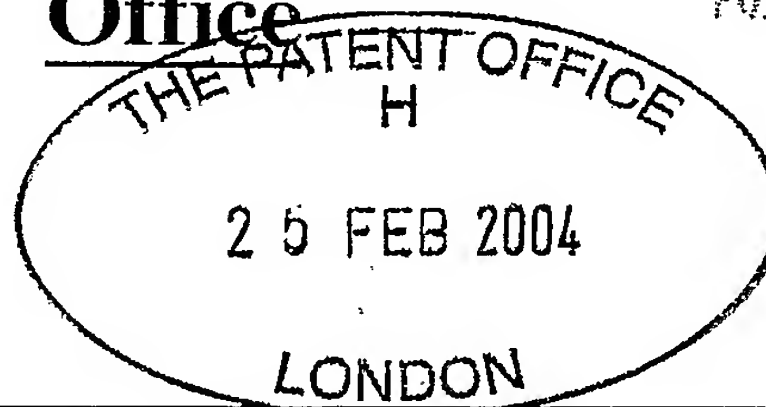

The Patent Office
Cardiff Road
Newport
Gwent NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

A30488

25 FEB 2004

2. Patent application number
(The Patent Office will fill in this part)

0404196.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

**BRITISH TELECOMMUNICATIONS public limited company
81 NEWGATE STREET
LONDON, EC1A 7AJ, England
Registered in England: 1800000**

Patents ADP number (if you know it)

1867002

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

4. Title of the invention

OVERLOAD CONTROL IN A COMMUNICATIONS NETWORK

5. Name of your agent (if you have one)

"Address for Service" in the United Kingdom to which all correspondence should be sent (including the postcode)

**BT GROUP LEGAL
INTELLECTUAL PROPERTY DEPARTMENT
PP: C5A, BT CENTRE
81 NEWGATE STREET
LONDON, EC1A 7AJ, ENGLAND**

Patents ADP number (if you know it)

1867001

8772378001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

YES

(See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form -

Description - 25 ✓

Claim(s) - 05 ✓

Abstract - 01 ✓

Drawing(s) - 14 + 14 

10. If you are also filing any of the following, state how many against each item

Priority Documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

YES ✓

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature(s) 

Date:

25 February 2004

LLOYD, Barry George William, Authorised Signatory

12. Name and daytime telephone number of person to contact in the United Kingdom

ROHINI RANJITKUMAR

020 7356 8456

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

OVERLOAD CONTROL IN A COMMUNICATIONS NETWORK

The present invention relates to overload control in a communications network, particularly but not exclusively to an external overload control system for a Media Gateway Controller (MGC) to restrict the rate at which offered calls are received by the MGC from Media Gateways (MGs) in a VoIP network.

Tele-voting (in which a telephone number is broadcast for users to call to register their vote) and similar mass calling schemes often result in very high call rates which have a sudden onset and which last for a relatively short duration. It is not economic to provision sufficient network capacity to cope with such overwhelming surges in traffic, necessitating overload control to be implemented with the communications network to enable emergency and other core services to be supported. However, traditional methods to cope with sudden surges in the number of calls sent to a specific network address are not satisfactory as the communications networks themselves evolve.

Conventional methods of providing overload control in a communications network include call gapping techniques which seek to limit the number of calls made. Such call gapping techniques are well known to those skilled in the art and involve barring or blocking calls received within a predetermined interval of time (the gap) following a first call which triggers the onset of the gap. An example of a call-gapping technique is described for example in United States Patent number US 6,259,776 entitled "System for controlling telecommunications overload traffic", the contents of which are hereby deemed incorporated into the description by reference.

25

However, traditional telecommunications networks are evolving to offer more functionality and to support differing media from that offered by conventional public switched telephone networks (PSTNs). For example, call concentrators in PSTNs can be replaced by access media gateways (MGs) which convert conventional copper line to provide access to Internet Protocol (IP) media transport. In such communications networks, the MGs are controlled by Media Gateway Controllers (MGCs) which perform a traffic analysis role by analysing dialled digits to determine the routing of calls, analogous to the local exchange processors implemented in conventional PSTNs. More details on MGs and MGCs can be found from the Media Gateway Control (MEGACO) Charter standard documentation available from the Internet

35

Engineering Task Force (IETF) standardisation body (url
<http://www.ietf.org/html.charters/megaco-charter.html>).

Whenever a destination telephone number is advertised on a national basis and a
 5 significant number of customers attempt to make a call to the telephone number, a
 focused overload of calls seeking to use incoming trunks to the destination main
 switching unit and/or the destination local exchange can result in switch blocking of
 normal service traffic. Several techniques have been proposed to deal with such
 problems within conventional PSTNs, such as US 6,259,776 proposes for example.
 10 US 6, 259,776 describes a telecommunications network including an overload control
 arrangement in which the overload control arrangement restricts call connections to a
 predetermined destination when traffic to such a destination exceeds a predetermined
 level. The arrangement comprises a plurality of identical overload control functions
 15 each running in a respective one of a plurality of nodes of the network and each having
 a respective gapping period determined from the perceived overload level at the
 respective node, the overload control functions exchanging data defining their
 respective gapping periods and effecting adjustment towards and average gapping
 period so that substantial differences between respective gapping periods from
 respective nodes to any one predetermined destination is avoided.

20

Whilst the overload control system described in US 6, 259, 776 provides an effective
 solution in a conventional telecommunications SS7-type network, however, it is less
 effective for communications over an Internet Protocol (IP) network or similar type of
 network where a large number of network access points ($A_1...A_N$) may be under the
 25 control of a single network access controller X_1 , such as Figure 1 of the accompanying
 drawing shows. In such situations, the critical overload condition for the network is
 related to the maximum call processing capacity of the controller X_1 , which has only a
 finite amount of resources available to process calls seeking admission to the network.
 This limitation on the number of calls admitted to the network is shown schematically in
 30 Figure 2 of the accompanying drawings.

In the graph shown in Figure 2 the x-axis represents the rate of calls offered to the
 network access controller by the network access points and the y-axis represents the
 number of calls admitted by the network access controller to the network. The total
 35 number of aggregated calls offered by all of the access points $A_1...A_N$ which are

actually admitted by the controller X_1 to the communications network is as a function of the aggregated offered rate is shown by the solid line plot. Where the offered rate is relatively low, the admission rate is able to rise to match the number of calls offered. However, the controller has only finite resources and as the use of its resources increases, eventually the controller becomes overloaded. This occurs at the point marked A in Figure 2, and at this point, the controller needs to reject a certain proportion of off-hook signals received to prevent further calls from being admitted to the network by the network access points.

As the number of new calls offered increases beyond point A, the admission rate fails to rise as sharply, and finally the admission rate for calls to the network reaches a maximum for a given rate of offered calls L_M . Beyond this point, the resources of the controller become increasingly involved with rejecting offered calls as opposed to admitting calls. Eventually, when the number of offered calls reaches rate L_C all of the controller's resources will be occupied in rejecting calls, and no new calls will be admitted.

The network access controller's internal control mechanisms are reflected in the diagram shown in Figure 2. The access controller's internal control provides the ability to reject some of the offered load only, and provides no ability to regulate any external restriction (such as gapping) on the offered load.

The dashed curve in Figure 2 shows the response time of the network access controller to the off-hook signals it receives from the network access points within its domain of control. Initially, prior to the overload point being reached, the controller will have a slowly rising response time as it steadily processes more and more offered calls. The ability of the access controller to reject offered calls needs to be coupled with an effective external restriction if the access controller is to regulate its response times. Whenever the traffic offered to the network access points exceeds L_M it is necessary to implement some form of adaptive external restriction control to ensure the rate offered to the access controller is held relatively close to L_M to maximise the access controller's throughput.

One form of adaptive external control known to those skilled in the art is that provided by a conventional call gapping overload system. The call gapping process enables the

load offered by the network access points to the access controller to remain around L_M which enables the access controller's response time to remain relatively constant. However, if no external control is implemented, or if the external control is not sufficient to limit the offered call rate to the vicinity of L_M , then if the offered rate rises until it approaches L_C the internal overload control process implemented by the overload controller will effectively reduce the access controller's throughput to zero, which would result in none of the offered traffic from being admitted to the network.

Conventional call gapping process have other limitations however. For example, if the process is applied within a system in which a large number of network access control points are controlled by a single access controller (also known to those in the art as a very high "fan-in"), the rate at which traffic is admitted by the external restriction (i.e. applied by the network access points) responds too slowly to commands from the control point to change the admitted rate (i.e. to change the gap interval if a gapping process is used to implement the external restriction). This slow response by the network access points results in the overload control servo loop being slow and possibly unstable.

Other sources of delay contributing to this slow response problem include:

delay in sending control messages out from the access controller to the network access points due to the large number of control messages which need to be sent;

the first offered call always being admitted by the external restriction in a conventional call gapping process when a call restriction is being initially imposed, which then generates a synchronisation effect if all of the network access points then have concurrently running active interval timers imposing a call gap; and

if a gap interval update is applied to an access point which is already being gapped, the delay waiting for an existing gap interval timer to expire before the updated gap can have an effect on the admitted rate.

30

Thus the techniques imposed by convention call gapping are no longer effective in situations where the critical overload condition occurs at an access controller which controls a number of access points.

One object of the invention seeks to provide an adaptive external overload control scheme for a communications network in which an access controller controls a plurality of network access points arranged to admit traffic to the communications network. In particular, one object of the invention seeks to mitigate and/or obviate the problems which may occur when an access controller such as a Media Gateway Controller (MGC) detects an overload condition by providing an overload control system for the network which prevents a focussed overload of calls at the access controller. In particular, an overload control system which prevents synchronised repeat focussed overloads from occurring within the network. Here the term "focussed overload " refers to traffic whose processing for admittance to the network is focussed on a particular access controller, as opposed to controlling the overload at its focus destination (if the majority of calls are directed to a particular address or part of an address within the network). The traffic itself may comprise voice and/or data traffic (e.g. sms or electronic mail type traffic).

Another object of the invention seeks to provide an overload control system in which an access controller externally regulates its offered call rate by multicasting a scalable call gap interval determined by the access controller to a number of network access points arranged to offer calls to the access controller. Each network access point is then able to modify the scalable call gap according to their individual characteristics. Examples of individual characteristics of a network access point include, for example, the number of lines along which the access point receives traffic seeking admittance to the network.

Yet another object of the invention seeks to regulate traffic according to the particular network destination address of the traffic as it is admitted by each network access point.

SUMMARY STATEMENTS OF THE INVENTION

A first aspect of the invention is provided by claim 1.

Advantageously, the invention seeks to provide an adaptive overload system for controlling the amount of traffic processed by a network access controller is described

for a network access controller arranged to control a plurality of network access points. Each network access point provides traffic with access to the communications network and the system comprises determining at the network access controller if an overload condition exists, and if so, generating at least one global constraint to restrict the rate at which a network access point admits said traffic to the communications network. The global constraint is thus determined for all of the network access points by the access controller determining that the rate at which traffic is being offered to the access controller for processing has exceeded a predetermined cut-off. A global constraint generated by the controller may be specifically for traffic whose destination comprises a particular address. Alternatively, a global constraint generated by the network access controller may instead comprise a default global constraint to be applied to traffic independently of the destination address of the traffic. The controller then communicates the at least one global traffic constraint to one or more of said plurality of network access points. It is preferable if the communication technique employed is a multi-casting (or broadcasting) type of technique.

Each network access point receiving the global constraint then processes the global traffic constraint to determine a plurality of local constraint conditions. The receiving network access point performs the following steps to determine said local constraint conditions: determining a local predetermined gap interval to be imposed on said traffic; and determining an initial gap interval which differs from the subsequent local predetermined gap intervals, the initial gap intervals differing between each of said plurality of network access points. The initial gap intervals are determined in either a random or pseudo-random manner to ensure synchronisation effects at the network access controller which would otherwise occur in high call rate scenarios are removed.

The initial gap intervals are applied immediately, without the need to be triggered by a call arriving. If a zero initial gap interval is applied, then the next call to be received by the media gateway will trigger the imposition of a standard gap interval.

The remaining aspects of the invention are provided by the accompanying independent claims and the preferred features are recited by the dependent claims thereon. The preferred features may be suitably combined with any of the aspects of the invention where the suitable combination is apparent to those skilled in the art.

Thus invention provides a method of controlling the rate at which traffic seeking access to a communications network is processed by an access controller, and more specifically to a method of controlling the offered call rate at a media gateway controller. Advantageously, the rate of admission at each access points within the domain of control of an access controller can be changed dynamically and nearly instantaneously in response to a restriction requested by the access controller.

10 BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described with reference to the accompanying drawings which are by way of example only and in which:

15 Figure 1 shows a schematic diagram of a communications network;

Figure 2 shows the result of overloading an access controller in a communications network;

20 Figure 3 shows a fixed gap interval overload control scheme;

Figure 4 shows the number of offered calls to an access controller as a function of time for a fixed gap interval scheme implementing a Crawford algorithm;

25 Figure 5 shows steps in a overload control process according to the invention;

Figure 6 shows an embodiment of the invention in which the initial gap interval is varied between differing network access points in a communications network;

30

Figure 7 shows the results of applying an embodiment of the invention on the number of offered calls to a network access controller;

Figure 8 shows an enlarged view of a portion of the plot shown in Figure 7;

35 Figure 9 shows the results of applying another embodiment of the invention on the number of offered calls to a network access controller;

Figure 10 shows an enlarged view of a portion of the plot shown in Figure 9;

Figure 11 shows the message flow between a media gateway and a media gateway controller in an embodiment of the invention;

Figure 12 shows schematically how the overload control can be implemented on a per-

5 number basis in an embodiment of the invention;

Figure 13 shows a locally determined constraint update process; and

Figure 14 shows a globally determined constraint update process.

The best mode of the invention as currently contemplated by the inventor(s) will now be
 10 described with reference to the accompanying drawings. Those skilled in the art will
 realise that the embodiments described in detail below are exemplary only and that
 where alternatively features and steps apparently equivalent to those described in the
 text exist, these equivalents are considered to be implicitly included as alternatives to
 such features in the description. The scope of the invention is therefore to be
 15 determined by the accompanying claims. In particular, where reference is made to a
 "call" this term should be interpreted to include not just voice calls, but any other form
 of communication (for example, a small text messaging service call and/or an instant
 messaging call and/or an electronic mail call) where the form of communication is
 known to those skilled in the art as capable of being converted into a form which can
 20 be supported by the network and processed in an equivalent manner by an network
 access point and/or an access controller in the network to the way in which a
 conventional call would be processed. Similarly, the term "traffic" includes "calls" which
 may comprise voice traffic within a VoIP network, or other forms communication traffic
 such as small messaging service (sms) text message traffic, electronic mail traffic,
 25 instant messaging traffic etc as described above. Thus, as has been stated above,
 although the invention will be described primarily in terms of voice calls, those skilled in
 the art will appreciate that the term "call" is intended to cover responses which
 comprise other media such as electronic mail or sms text messages, which can create
 focussed surges within the network as a large number of "callers" seek to communicate
 30 with one or more addresses.

Returning to Figure 1 of the accompanying drawings, a communications network 1 is
 shown to which access is provided by a number of network access points $A_1 \dots A_N$,
 $B_1 \dots B_M$, $C_1 \dots C_L$. Access to the communications network 1 via the access points $A_1 \dots A_N$,
 35 $B_1 \dots B_M$, $C_1 \dots C_L$ is controlled by one or more access controllers, for example access

controllers X_1, X_2, X_3 . As shown in Figure 1 network access via $A_1 \dots A_N$ is controlled by X_1 , network access via $B_1 \dots B_M$ is controlled by X_2 etc. Typically, the number of access points controlled by an individual access controller will be relatively high, for example, several hundred access points (and upwards) may be controlled by a single access controller. Not shown in Figure 1 is the fact that each access point may be connected to a differing number of lines, thus access point A_1 may be connected to only one line, but access point A_2 may be connected to twenty five lines etc. A single access controller such as X_1 may therefore have a number of different types of access points to control within the domain of its control, the network access points differing not only in the number of lines for which they provide access to the network, but also otherwise, such as in their capacity etc.

In one embodiment of the invention, the communications network comprises an Internet Protocol network, and the network access points comprise Media Gateways (MGs) which can support the conversion of voice traffic to IP traffic, thus enabling a Voice over IP (VoIP) service to be supported. The rate at which traffic (equivalently calls) is admitted to the IP communications network is regulated by one or more network access controllers. In this embodiment, each network access controller comprises a Media Gateway Controller (MGCs).

20

More generally, the term "network access point" refers to a point within the domain of the communications network which functions to provide access to the communications network from another network, and the term "network access controller" refers to a point within the communications network domain which provides a control function for the network access point.

25

The Media Gateway Control Protocol Architecture and Requirements standard document RFC 2805, the MEGACO protocol RFC 2885 (now obsoleted by RFC 3015), the Megaco Errata RFC 2886 (now obsoleted by RFC 3015), the Megaco Protocol (with errata folded in) RFC 3015 now obsoleted by RFC 3525, and the Megaco IP Phone Media Gateway Application Profile (RFC 3054) and Gateway Control Protocol Version 1 (RFC 3525) form collectively some of the MEGACO standard literature relating to the implementation of media gateway control and describe formal definitions for the terms media gateway controllers and media gateways. The standards - documentation described above is all available via the MEGACO charter accessible

35

from the IETF standards forum web-site (url: www.ietf.org). An equivalent standard supporting the Media Gateway Control Protocol is provided by International Telecommunications Union ITU-T H.248.1

- 5 These standards define the Media Gateway (MG) function as providing a media mapping and/or transcoding function between potentially dissimilar networks, one of which is presumed to be a packet, frame or cell network. As an example, a MG might terminate switched circuit network (SCN) facilities (trunks, loops), packetize the media stream (where not already packetized), and deliver packetized traffic to a packet
- 10 network. An MG may also be configured to interface a packet (e.g. VoIP) network to a two-line wire analogue copper telephone transmission line or even to another packet (e.g. ATM) network which carries a multiplex of access lines by "loop emulation". The MG performs these functions in the reverse order for media streams flowing from the packet network to the SCN. MGs are not limited to SCN packet/frame/cell functions: a
- 15 conference bridge with all packet interfaces could be an MG, as well as an (IVR) interactive voice recognition unit, an audio resource function, or a voice recognition system with a cell interface. A Media Gateway Controller (MGC) is defined as providing a control function for the MG.
- 20 In Figure 3 of the accompanying drawings, a fixed gap interval call gapping technique is shown schematically, to demonstrate the effects a fixed gap interval applied at the network access points can have on the number of calls offered to the network access controller. If this gapping applied to the access controllers shown in Figure 1 to regulate traffic entering the communications network, the fixed gap interval call gapping
- 25 process, for example, one implemented using a normal Crawford algorithm by each of the network access points can result in repeated call surges being experienced by the access controller. These repeated surges occur in a synchronised manner and result from the Crawford algorithm, which in its basic form admits the first call from every MG and then admits no calls from any MG during the gap interval. Synchronisation
- 30 detrimentally affects the operation of the overload control servo-system because the MGs are not able to deliver the rate requested by the MGC until sufficient time has elapsed for the synchronisation to be washed out by the randomness of call arrivals. This can be an unacceptably long time for stable control if the inter-call arrival time (for calls offered to the MGs) is much less than the gap interval. Synchronisation effects
- 35 only occur in the overload response if the call rate is sufficiently high and the gap

interval is sufficiently long. It is the ratio of the inter-call arrival time for calls offered to the MGs to the gap interval each MG imposes on the arriving calls, and on the distribution of the numbers of lines at individual MGs. If all MGs have the same number of lines, then the synchronisation effect is more pronounced, however, if there

5 is a broad continuous distribution in the numbers of lines attached to each MG, the synchronisation effects may be less severe, although the response of the arrival rate at the MGC to a change in the gap interval is still affected.

Referring to Figure 3 in more detail, the upper part of the drawing shows schematically

10 a number N of access points applying a regular gap interval by implementing a Crawford algorithm such as is well known to those skilled in the art. In the lower part of the drawing, a schematic plot of the number of calls received by a network access controller (for example, a MGC) as a function of time when a constant gap interval is imposed is shown.

15

As is well known to those skilled in the art, the Crawford algorithm enables each network access point to apply a gap interval on its calls which allows a first call to be admitted but then blocks all subsequent calls for a predetermined duration of time (the gap interval) g (such blocked calls are indicated in Figure 3 by the arrows in the shaded

20 areas - calls which are not blocked are indicated by arrows in non-shaded areas). After expiry of the first gap interval g , the next call requesting network access is admitted but then a subsequent call gap interval is applied.

As Figure 3 shows, initially the high call rates results in the call gaps imposed by each

25 of the access points superimposing to a high degree which results in the aggregate number of calls processed by the access controller falling to near zero. Each network access point (shown in Figure 3 for example, as MG #1...N) forwards an initial unblocked call to the network access controller (also referred to herein as the network access controller). Then, for given gap interval $g = \Delta t$, the network access controller

30 (for example, a MGC), experiences a sharp reduction in the total number of calls received. However, on a timescale roughly equivalent to the duration of the gap interval g , the number of calls offered by all the access points to the network access controller rises again sharply. Only as time processes do the maximum number of calls offered to the access controller decline and spread over a wider intervals as the

35 gap intervals become less correlated and less overlap occurs. This is shown in Figure

3 by the wider off-sets between the subsequent gap intervals. This "synchronisation" of the call pattern eventually disappears if the gap remains in place for an extended period of time.

- 5 This behaviour is can be seen more clearly in the simulated example shown in Figure 4, where a normal Crawford gapping algorithm has been used to impose a gapping process on a large number of access points comprising both 25-line MGs and single-line MGs. In Figure 4, after each call a network access point receives, a local gap interval is determined according to the type of network access point. For example,
- 10 where a MG receives calls over 25-lines, a 60 second gap is imposed during which other calls are blocked (and during which a caller may receive some signal indicative of the call being blocked, such as a line busy or a disconnection or other dial tone). However, each a single line MG applies a gap interval of 25 times the gap interval imposed by the 25-line MG. Thus in this example a gap interval of 1500 seconds is
- 15 applied by each single-line MG. In each type of MG, once the local gap interval has expired, the next call received by a network access point will be forwarded to the access controller and then a subsequent gap interval is imposed during with further calls are terminated.
- 20 In Figure 4, the ordinary Crawford algorithm has been applied to a mixed population of 250,000 lines in the example shown which relates to 125,000 lines spread over 25-line access points and 125,000 lines on single line access points. The offered rate of calls from the access points to the access controller is 1600 calls per second (cps), and the access controller target rate is 160 cps. Such a ten-fold overload is considered to be
- 25 typical of the type of focussed surge which communications networks can expect to experience as televoting-type mass calling services gain popularity.

The overall behaviour shown in Figure 4 demonstrates a synchronised admission profile from the 25-line MGs superimposed on a falling trend as the single-line MGs

30 progressively apply their first gap. The simulation does not shown the synchronisation of traffic admitted by the single-line MGs as this occurs over a much longer time-scale than that shown in the plot of Figure 4.

The admitted traffic rate shown in Figure 4 changes over a time-constant roughly

35 equivalent to the per-access point (i.e., gateway) call gap duration. However, this

presents a problem, firstly as the repeated surges themselves may also overload the access controller, and secondly, as the access controller can make control update decisions at most only once every gap duration (i.e., every 60 seconds). This is too slow to adapt to an overload event which may require control updates of every 5s or so.

To cope with highly variable and very high calling rates which are many times (for example, more than twenty times) the busy hour rate, the access controllers according to the invention implement a very rapid overload control. In particular, the overload control is imposed externally to the access controllers, by enabling each access point to function as an external controller implementing a local access constraint to limit the rate of traffic admitted to the network. The invention enables the access controller to determine an overload condition based on the number of calls which it receives from a plurality of access points (generally all of the access points within its domain but not necessarily always all). The access controller then determines a global constraint to be imposed to reduce the rate of traffic which is admitted to the network. Each access point then modifies the global constraint to determine a local constraint which it uses to regulate the rate at which traffic is admitted to the network. In a preferred embodiment of the invention, the access controller no longer actively responds to off-hook indications received from calls which are to be blocked by the access points imposing a call gapping process. In another preferred embodiment, an access point does not need to send an off-hook to the access controller for calls which are not admitted by the local constraint applied at the access point.

Advantageously, the imposition of an initial, randomised local gap interval which is applied by an access point without a triggering call needing to be received by the access point, enables the access controllers to provide a more responsive overload control, and enables the access controller to provide updated global traffic rate constraints on a frequent basis. The modification of the global traffic rate by each access point is particularly advantageous within any network in which the access points have differing capacity (e.g., are arranged to receive traffic along a differing number of lines). For example, the population of access points within an IP network, in which each access point comprises a media gateway, can vary in composition considerable, from single-line MGs (of which there may be several thousand for example) to a single MG with a much higher capacity (for example, the ability to handle 16,000 lines). In

such IP networks, it is not possible to apply a global constraint across the entire network as the gap interval imposed would not be suitable for all of the different types of MGs.

- 5 The invention thus provides an adaptive overload system for controlling the amount of traffic processed by a network access controller, where the network access controller is arranged to control a plurality of network access points, each network access point providing received traffic with access to the communications network.
- 10 Steps to be performed to implement the overload control system are shown schematically in Figure 5 of the accompanying drawings. In Figure 5, the system comprises the controller determining whether an overload condition exists (step 102), for example by monitoring and analysing the traffic requests which it receives from all (or a subset of) the network access points within its domain of control (step 100). By
15 determining from the level of traffic offered to the access controller for processing whether an overload condition has/is likely to occur, a centralised overload system can be implemented by the access controller which provides a consistent and more rapid response to the overload condition across the network. This centralised overload response is provided by the network access controller multi-casting to each network
20 access point which is functioning as a source of traffic offered to the access controller one or more control messages (step 104). At least one control message contains at least one globally determined traffic rate constraint condition. In some embodiments of the invention, more than one global constraint to be determined by the network access controller, if, for example, a per-number constraint is to be imposed. In such an
25 embodiment of the invention, a general, default constraint condition can be imposed to prevent other traffic from overwhelming the network access controller with requests for processing, and one or more other global constraints can be imposed to prevent calls to a particular address from overwhelming the network access controller.
- 30 Each of the plurality of network access points within the domain of control of the network access controller receives said one or more multi-cast messages containing at least one global constraint. Depending on the type of multi-cast technique employed, this may be either all or a subset of the network access points within the domain of control. The received global constraint information is then processed by the receiving
35 network access point (step 106) to determine one or more local constraint conditions.

- The set of at least one local constraint conditions to be imposed at the access point functioning as a source of traffic to the communications network is determined by modifying the global constraint condition in accordance with one or more characteristics of the network access point. The local constraint conditions include
- 5 determining from the global constraint condition(s) at least i) the duration of the first gap interval to impose (step 108), and ii) the duration of subsequent gap intervals to impose, on subsequent traffic request (i.e., on subsequent calls which seek access to the communications network) (step 110).
 - 10 In an embodiment of the invention where the communications network supports IP (or VoIP), the global traffic rate constraint condition can be determined by a central destination MGC which functions as a controller for a set of MGs in the network. The MGC multicasts the control messages using layer-2 and layer-3 mechanisms, enabling the MGC controller to multicast only one global constraint-related message which is
 - 15 copied into the network infrastructure whenever a gap interval needs to be imposed or updated. The global constraint related message is received by all traffic sources (MGs) subscribing to the multi-cast group with virtually no delay, enabling a fast response to the overload condition at the processing MGC to be implemented by all MG which receive the global constraint message.
 - 20 Each access point receiving a multicast global constraint message modifies the received global constraint information firstly by performing a modified Crawford algorithm to adjust the globally determined gap interval to an interval more suitable for the traffic rate and number of lines over which the access points receives traffic
 - 25 seeking access to the network. Secondly, the initial local gap interval is randomised in length to remove any synchronisation effects which could otherwise occur in mass calling scenarios with other network access points which could determine a similar local gap interval.
 - 30 Any suitable technique may be employed to determine the duration of the initial gap interval, and the access point will effectively behave as if a gap of the subsequent (fixed duration) time interval was imposed at some point in the past. This is shown schematically in Figure 6 of the accompanying drawings. Figure 6 shows a number of network access points (#1 to #N) all of the same type implementing an initial gap which
 - 35 varies in a random manner, followed subsequent gaps which all have the same interval

duration. Effectively, this simply delays the onset of the next full gap interval by a varying amount for all the access points subscribing to the multicast issued by the access controller. The duration of the first gap interval can be determined using any suitable technique, e.g. using a random or pseudo random technique, so long as the result removes the superposition of call blocking experienced at the access controller (e.g., at the MGC).

To determine a global constraint condition, in one embodiment of the invention, the access controller provides each access point via the multi-cast message(s) with a per-line gap g interval and an estimate of the current rate per line r . In the steady state, there is a probability $1/(1+r*g)$ that the access point does not have an active gap interval. For access points which have an active gap interval, the initial gaps can be assumed to endure for a initial period of time which is equivalent to a gap of the standard interval duration having arrived at a previous point in time between 0 and the gap interval G being applied by that particular MG (see Figure 6). Providing each access point uses random numbers to determine firstly if it should have an active gap interval, and if it does secondly to determine how much of the gap interval is left to run (which will be uniformly distributed in the range 0 to $G=g/L$ where L is the number of lines managed by the gateway), the synchronisation effects which would otherwise appear in the offered call rate at the access controller will no longer appear. This can be seen in Figures 7 and 8 of the accompanying drawings.

In Figures 7 and 8, a global constraint is provided by an access controller (for example a MGC) to five thousand network access points (for example MGs). Each access point is configured to receive traffic along twenty-five lines to be forwarded over a communications network (for example a VoIP network).

As shown by the embodiment of the invention in Figure 8, consider if the number of calls offered by a plurality of MGs to a MGC is initially around 800 calls per second, whereas the MGC has a target rate of around 100 calls per second. Such call volumes are typical in televoting type scenarios. Accordingly, the MGC will multi-cast a global call-rate constraint containing a global gap interval parameter to several of the MGs within its domain of control to apply external overload control. The MGs then adapt the global constraint to their own capacities to determine a local gap interval. The MGs then each determine in a random or pseudo random manner an initial gap interval

which may range from zero to the full local gap interval. Each MG then imposes the initial gap interval (if non-zero) without waiting for a call to be received, effectively this means the initial local gap interval is imposed as soon as the MG has determined its duration. This results in a drop in the number of calls offered by the MGs to the MGC which does not display the synchronisation effects known to occur in such scenarios when conventional call gapping techniques are employed. In Figure 7, the MGC requests a restriction at $t = 100$ seconds, i.e., at $t = 100$ seconds the global constraint is generated and communicated to each of the MGs. The traffic admitted through each MG is then subject to the local constraint conditions, effectively almost immediately on receipt of the global constraint information from the MGC.

Figure 8 shows in more detail the region indicated in Figure 7. In Figure 8, the relative proportions of the type of calls which are forwarded to the MGC by an MG following the MG implementing a local gap condition are shown schematically. Briefly, the calls subsequently forwarded to the MG can be either i) a call forwarded without being subjected to a local gap condition as an initial gap interval of zero had been previously applied; ii) a call forwarded after an initially shortened local gap interval has been applied; or iii) a call forwarded after a normal regular length local gap interval had been applied by the MG. This later group of calls (iii) obviously forms a substantial proportion of the calls much later than calls in groups (i) or (ii).

In Figure 8, the sum of all calls forwarded admitted on a MG is shown indicated by the line with X's marking each plotted point. Initially, the number of calls admitted by MGs which effectively did not impose an initial gap interval (i.e., for which the initial gap interval was zero) dominates the received calls. This is shown by the line with \diamond marking each plotted point. As time progresses, however, the line with \square making each point shows the number of calls admitted after the expiry of the initial (shortened) local gap interval begins to dominate. Eventually, as the line with Δ marking each plotted point shows, the number of calls admitted after the expiry of a normal (regular) local gap dominates the population of calls forwarded to the MGC by an MG..

Figures 9 and 10 shows another embodiment of the invention, demonstrating the effect of the global constraint imposed by an MGC when two differing populations of MGs are contained within its domain of control. In Figure 9 and 10 more complex behaviour is exhibited. Here 125,000 lines are connected to 25-line gateways, and 125,000 lines

are connected to single-line gateways. The single-line gateways scale the proportion of calls by a factor of 25 compared to the results obtained for 25-line MGs (such as Figures 7 and 8 show).

5 As Figure 7 to 10 clearly indicate, however, the synchronisation effect which would otherwise enable repeat processing demand surges to be experienced by the access controllers (e.g., the MGCs) is removed by the introduction of the initial gaps which have a gap interval which varies in a random manner between the access points. Apart from their duration being different, the initial gaps otherwise perform a
10 conventional gap function. All calls arriving before the expiry of the interval timer are rejected, but if a call arrives after expiry of the interval time, the call is admitted and a new gap timer commences.

15 When a gap interval update arrives after the start of the local overload control being implemented by a network access point, a mechanism to enable the control to be imposed almost immediately can be provided by ensuring that if a second control message is received, the constraint process described above is automatically re-iterated. One possible scheme to implement an update is for the access controller to
20 determine on a periodic basis that the overload condition is still exceeded, and for the access controller to determine from the aggregated traffic rate which it is then receiving from all network access points providing traffic to the access controller that an update in one or more global constraint (i.e., a new scalable global gap interval) is necessary. If the new global gap information which is sent down to each access point contributing
25 to the aggregate rate the access controller has measured results in the access point determining a local gap interval which is less than the currently imposed gap interval, any currently running interval timer may be updated to reflect this change and the currently running interval reduced accordingly (or set to zero). If the new global gap interval results in the local gap interval being updated to a longer period, then the local
30 interval timer may be extended, lengthening any gap already imposed. Alternatively, in either case, the currently running interval could be stopped and a new initial local gap interval determined whose duration is between zero and the new gap interval duration, which effectively reiterates the overload control process.

Another advantage of the invention is that the access control implemented enables the network access points (e.g., the MGs) to prioritise certain calls, for example, those to emergency services (such as 999, 911 etc), as well as enabling appropriate termination of blocked calls (for example to ensure that all relevant state machines reflect any changes back to an on-hook condition). The invention also enables the called address to be determined prior to the restriction being imposed, by selecting the positioning of the global constraint message in the message flow between the MGC and the MG appropriately.

For example, turning now to Figure 11 of the accompanying drawings, an example of a message flow between the MGC and the MG according to an embodiment of the invention is shown. Whilst in the following embodiment explicit reference is made to a standard which is relevant in the context of media gateways (MGs) and to media gateway controllers (MGCs), those skilled in the art will appreciate that alternative standards may support similar message flows between other types of network access points and network access controllers.

Referring now to Figure 11, initially, as a call commences the MG line-state-machine (LSM) is put in an off-hook condition, the off-hook is then notified to the MGC, which acknowledges the message to the MG. If the H.248 protocol is supported, then the off-hook condition should be immediately notified by MGC to the MGC call processing application (CpApp), however, it is not essential to notify the off-hook condition, and if strict compliance with H.248 is not required, this can be deferred or not implemented at all. If the MGC CpApp has been notified, it will return a message to the MG via the MGC indicating the type of dial-tone in use, together with details of any dial-plan which is being supported. An alternative use of H.248 enables the MGC to send the dial-tone and dial plan (for application to a specific physical termination, i.e., copper pair) to the MG in advance of a call (e.g., when the required dial tone changes). This removes the need for the MGC to send anything back in response to the off-hook, and enables the possibility of not sending the off-hook.

As the call progresses, the MG LSM will forward the called digits it receives to the MG which will then implement the dial-plan and perform the necessary gap analysis in accordance with the control constraints imposed by the MGC/MGC CpAppl. If the gap is being imposed, then the MG may wish to communicate this, for example, by

generating an Equipment Engaged Tone to the call originator. If no gap is being imposed, then the digits 1-n can be communicated to the MGC.

5 In an alternative embodiment of the invention, the MG does not receive an acknowledgement to the off-hook message to reduce the per call processing burden of the MGC. Instead, the MGC simply provides the MG with details of the dial tone type (i.e., DT(n)) and details of whether a dial-plan is to be implemented.

10 The dial-plan means that after a certain number of digits have been sent to the MG, the MG analyses the numbers dialled to determine if the call conforms with the criteria imposed by the dial-plan for implementing the gap constraint. A default constraint may be imposed for certain numbers which are not otherwise supported by the dial-plan. If the call is determined to be exempted from the gap constraint, it is sent to the MGC, however, if not, the call is only sent to the MGC if allowed, i.e., if a gap interval already
15 imposed has expired or if the initial gap interval is zero, so that no gap is to be imposed until after the next call is received. This is shown schematically in Figure 12 of the accompanying drawings which show the point at which the access controller notified for three differing types of call.

20 In Figure 12, the first call relates to a caller dialling 0800654321. This number is not recognised after the first three digits as relating to a priority call (which would trigger earlier notification to the MGC). However, the other two numbers shown in Figure 1 relate to priority numbers (112, and 999) which trigger early notification to the MGC. If another number, such as the number 012345 67890 were to be dialled, which was not
25 supported by the dial-plan, then a default (or wildcard) constraint could be applied by the MG.

30 One method of determining the global gapping interval at the access controller is for a controller to determine the rate at which it is rejecting the off-hooks provided by the signal sources. The controller is able to multi-cast a single per-user global gap which each traffic source then scales from the global gap size to a local gap size in proportion to its capacity, and then randomly imposes an initial gap duration from zero to the local gap size. Each traffic source then applies the local gap to all non priority calls, and the gapping impacts only the service offered to ordinary calls.

However, in another embodiment of the invention, the controller performs a similar adaptive internal control and measures the rate at which it rejects off-hook messages received from traffic sources, however, the controller performs analysis of the rejection rate in accordance with the called identities, to determine which called identities need
 5 gapping. In this context, a call identity may comprise a network address etc.

The controller then determines a global constraint and a per-number global constraint and multi-casts these global constraints to teach traffic source. A traffic source then scales the global constraints to determine from the global gap information provided by
 10 the controller what local gap interval size should be employed according to the capacity of the traffic source. A random initial gap interval size is also determine. As calls are made, the numbers dialled are analysed by the network traffic source to determine the most appropriate gap interval to use for the specific dialled number scheme. Thus in Figure 12, if certain digits are recognised as relating to a priority number, then no gap
 15 is imposed (e.g., the 112 and 999 numbers), whereas the 0800 6543231 number would be subject to normal barring. However, in other embodiments of the invention, the dial plan could indicate that only televote/mass dialling numbers are to be subjected to gapping, which would enable ordinary calls made to non-priority numbers to also be made without the access controller experiencing an overload of traffic processing.

20

In this way, a VoIP network which has a busy hour capacity of 16,666 cps can effectively cope when over 100,000 cps are forwarded from digital line exchanges, for example in a mass-dialling situation, without non-mass-dialling related traffic from being impacted. In such an embodiment of the invention, the control requirements of
 25 the MG-MGC are simply to maximise the effective call throughput at the overloaded MGC subject to the MG response times (which are usually less than 200 ms), and to enable both priority calls and optionally to protect ordinary (non-priority calls) from experiencing the surges induced by televoting type-calls.

30 Figures 13 and 14 contrast the overall architecture of the overload control in terms of the location of functions. In Figures 13 and 14, A is the MGC's admission function, R is the MGs local overload constraint restriction, and U is the update function.

Figure 13 shows MG- MGC scenario in a VoIP network in which restriction updates are
 35 to be implemented. In Figures 13 and 14, an off-hook signal is transmitted by the MG

to the MGC, the MGC applies admission control, and the MG applies an appropriate constraint to limit overloading of the MGC. However, in Figure 13, the MG updates the overload locally without any control by the MGC. This has a disadvantage in that if the MG is a single-line MG or has only a few lines, then it will send less calls to the MGC than other MGs which have a higher number of lines. This means that even if the MGC applies a global constraint which the MG then adapts for local constraint conditions, if no update is provided by the MGC, that MG may send relatively few calls through to the MGC, which would bias the global constraint process performed by the MGC (which is effectively starved of calls from that MG). As shown in Figure 13, therefore, external overload control which is not controlled and updated by the MGC may be provided more efficiently only if, when the MGC does not provide a response to a call offered by the MG within a predetermined period of time, the MG automatically rejects call as timed-out. This embodiment of the invention has the advantage of not requiring any modification to the H.248 standard recommendation. Depending on the type of restriction imposed, priority and/or non-mass-dialling related calls may not be rejected, however, as no global constraint is imposed, there will be a responsive delay as each MG needs to receive a control message from the MGC before it updates its local call restriction conditions.

Figure 14, in contrast, shows schematically the MGC determining the updated conditions. This enables a more responsive overload control to be implemented. In Figure 14, when the MG receives an off-hook condition, the MG forwards this to the MGC and the MG updates its global constraint condition. The MGC then determines if a new or updated global constraint is to be generated and communicates the new global constraint condition (i.e. new global gap interval) back to a selection (or all MGs) using an appropriate communications technique (multi-cast) to provide one or more control messages which all MGs receive. Each MG then processes the call using a modified local constraint which it determines from the updated global constraint information provided by the MGC to determine if the call is to be rejected or not.

The MGC has access to the aggregated traffic flows that it receives from each MG, and thus receives a higher traffic rate than each MG does individually, which enables an accurate estimate of the traffic rates (overall and to specific dialled numbers) to be obtained. As the traffic rate received by the MGC is higher than that at an individual MG, more frequent updates to the external overall control conditions to be implemented

by each MG (which receiving an updated global constraint from the MGC) than is possible if the MG were to determine local traffic rates and generate a local constraint independently of the MGC (such as Figure 13 showed).

- 5 This second control option has the advantage that the aggregation of overload can be avoided as there is an instantaneously effective gap with a randomised initial interval (which is multi-cast by the MGC). However, the H.248 standard recommendation may require modification in view of the global gap constraint being returned by means of a multi-cast message from the MGC, and the invention can be implemented by other
- 10 suitable techniques which communicate the global gap interval information to each MG which is contributing to the aggregate traffic rate determined by the MGC. It is up to each MG to modify the global constraints it receives to suit its own characteristics, and to implement local gap logic and appropriate dial-tones (although these may be determined centrally by the MGC).

15

- Thus In a mass calling scenario, each network access point will receive a large number of calls within a short period of time which all have the same target address (e.g., the same number can be dialled by a large number of calls within a very short, almost simultaneous, time period). Control over all of the access points can be implemented
- 20 by the invention relatively rapidly to prevent the response time from rising to unacceptable levels such as was shown in Figure 2.

- Those skilled in the art will therefore appreciate that the access controller is determining an aggregate traffic rate for the traffic which is it offered from each
- 25 contributing network access point. This aggregate rate is higher than the rate at an individual access point, which means that even when the external overload control has been already implemented, the access controller will be able to more reliably determine from the actual offered traffic rate whether the external overload control requires updating. The imposition by each network access point which receives a control
- 30 message from the access controller of a local constraint (i.e. a local gap interval) which is derived from the information the access controller has generated (which may comprise, for example, the aggregate traffic rate and per-line traffic rate information) can then be implemented more rapidly than if the update conditions were simply determined by the network access point itself. By imposing an initial gap duration
- 35 immediately which each access point determines autonomously (i.e., independently of

the initial gap duration imposed by each of the other access points), there is no need for the access points to communicate with each other.

5 Although the means by which control messages are communicated by the network access controller to each network access point is preferably performed by a multicasting technique limited to those access points contributing to the aggregate offered traffic rate at the network controller, other suitable communications means known to those skilled in the art may be employed.

10 Where a multicasting means of communication is employed by the access controller, the network will need to support the communication multicasting process (or an equivalent selective broad-casting type of process) which enables the access controller to multicast the global traffic access rate constraint(s) over the communications network to the network access points. Multicasting is preferable as
15 this enables more rapid control to be imposed on the MGs in an IP network, and enables the MGC to be more responsive and to update the call constraints over shorter timescales than that known in the art. The adaptation of the multicast call constraint determined globally by the access controller to suit the individual MGs enables more effective call moderation by each MG within the domain of control of a MGC.

20

Those skilled in the art will further appreciate that if a unicast means of communication is employed to communicate the global constraint information to each access point, then the differences in transmission time for the overload control messages containing the global constraint information from the access controller to each MG may
25 eliminate the need to implement a randomised initial gap interval. For example, if the transmission time is of the same time-scale and randomisation as the characteristic initial gap time implemented by a network access point there is no need to randomise the initial gap interval and an access point can immediately implement the standard gap interval Δt following receipt of the unicast control message.

30

The text of the abstract repeated below is hereby deemed incorporated into the description:

An adaptive overload system for controlling the amount of traffic processed by a network access controller is described for a network access controller arranged to
35 control a plurality of network access points. Each network access point provides traffic

with access to the communications network and the system comprises determining at the network access controller if an overload condition exists, and if so, generating at least one global constraint to restrict the rate at which a network access point admits said traffic to the communications network. The controller then multicasts at least one
5 global traffic constraint to one or more of said plurality of network access points. Each network access point receiving the global constraint then processes the global traffic constraint to determine a plurality of local constraint conditions. The receiving network access point performs the following steps to determine said local constraint conditions: determining a local predetermined gap interval to be imposed on said traffic; and
10 determining an initial gap interval which differs from the subsequent local predetermined gap intervals, the initial gap intervals differing between each of said plurality of network access points. The initial gap intervals are determined in either a random or pseudo-random manner to ensure synchronisation effects at the network access controller which would otherwise occur in high call rate scenarios are removed.

15

Although the above embodiments have been described with reference to modifying a Crawford algorithm to determine the local gap interval, those skilled in the art will appreciate that other restriction algorithms which can be applied by the network access points to restrict the traffic rate offered to the controller may be suitably modified to
20 implement alternative restrictions in other embodiments of the invention.

CLAIMS

1. An adaptive overload system for controlling the amount of traffic processed by a network access controller, the network access controller being arranged to received
 5 traffic offered by a plurality of network access points, each network access point providing said traffic with access to the communications network, the system comprising:

monitoring the aggregate offered traffic rate comprising the traffic offered by all of said plurality of network access points to said network access controller;

10 determining from said aggregate traffic rate if an overload condition exists at the network access controller, and if so, generating at least one constraint derived from said monitored aggregate offered traffic rate;

communicating said at least one constraint to each of said plurality of network access points,

15 processing at each one of said plurality of network access points received constraint information to determine one or more local constraints to be imposed on the traffic which limit the traffic offered by said one of said plurality of network access points, wherein the local constraint information implements an interval during which traffic received by the network access point is not offered to the access controller,
 20 wherein the aggregate distribution of intervals imposed by all of said network access points is randomised at the onset of the local constraint imposed by each said network access point.

2. A system as claimed in claim 1, wherein said randomisation is imposed
 25 individually by each network access point generating an initial interval whose duration is determined by a random process.

3. A system as claimed in claim 1, wherein said randomisation is imposed by individually by each network access point implementing said local constraint interval
 30 immediately following processing of the global constraint information received, and wherein the time for the global constraint information processing to be completed following the network access controller generating said global constraint information varies for each of said plurality of network access points.

4. An adaptive overload system for externally controlling the amount of traffic processed by a network access controller, the network access controller being arranged to control a plurality of network access points, each network access point providing said traffic with access to the communications network, the system
- 5 comprising:

determining at the network access controller if an overload condition exists, and if so, generating at least one global constraint to restrict the rate at which a network access point admits said traffic to the communications network;

- communicating said at least one global traffic constraint to one or more of said
- 10 plurality of network access points;

processing each global traffic constraint received to determine a plurality of local constraint conditions, wherein said receiving network access point performs the following steps to determine said local constraint conditions:

- determining a local predetermined gap interval to be imposed on said traffic;
- 15 and

determining an initial gap interval (Δt_0) which differs from the subsequent local predetermined gap intervals (Δt), wherein each initial gap interval (Δt_0) is determined independently by each of said plurality of network access points.

- 20 5. A system as claimed in claim 4, wherein in said step of communicating said at least one global traffic constraint to one or more of said plurality of network access points, at least one global traffic constraint is multicast to one or more of said plurality of network access points.

- 25 6. A system as claimed in either of claims 4 to 5, wherein the initial gap interval is determined at each network access point using a random or pseudo-random technique.

7. A system as claimed in any of claims 4 to 6, wherein the initial gap interval
- 30 (Δt_0) duration ranges from 0 to the subsequent local gap interval Δt .

8. A system as claimed in any of claims 4 to 7, wherein said communications network is a VoIP network, and said traffic comprises call-related traffic.

9. A system as claimed in any of claims 4 to 8 wherein said network access controller is a Media Gateway Controller and each of said plurality of network access points comprises a Media Gateway.

5 10. A system as claimed in any of claims 4 to 9, wherein a global traffic rate constraint is determined by said access controller for an address.

10 11. A system as claimed in any of claims 4 to 10, wherein the number of lines along which a network access point receives traffic for transmission across the communications network and a scalable gap interval determined by the access controller based on the aggregate traffic offered to the access controller by all contributing network access points is used to determine a local predetermined gap interval.

15 12. A system as claimed in any of claims 5 to 11, wherein in said step of multicasting is to all of the network access points controlled by the access controller.

20 13. A system as claimed in any previous claim, wherein the controller determines said at least one global traffic constraint by analysing the rate at which off-hook messages are rejected by the access controller.

25 14. A system as claimed in any previous claim, wherein the controller analyses the rate at which traffic is offered to determine said at least one global traffic constraint.

15. A system as claimed in any previous claim, wherein a dial-plan is implemented by a network access point to make it unnecessary to send an off-hook condition message to the access controller when a local gap constraint is being imposed.

30 16. A method of controlling the number of calls received by a media gateway controller for admitted to a communications network, the media gateway controller being arranged to be connected to a plurality of media gateways, the method comprising the steps of:

35 determining at least one scalable call rate control parameter at the media gateway controller;

the media gateway controller multicasting the scalable rate control parameters to each media gateway within the domain of control of the media gateway controller;

scaling the call rate control parameter at each media gateway to determine a scaled call rate control parameter at the media gateway, wherein the scaled call rate control parameter comprises a call-gap interval to be imposed by the media gateway on calls destined for the media gateway controller; and

the media gateway imposing a predetermined initial call-gap interval.

17. A method as claimed in claim 16, wherein the initial gap interval is initially active for a finite sub-set of said plurality of media gateways.

18. A method as claimed in any one of claims 17 to 18, wherein the initial gap interval is determined using a random or pseudo-random technique.

19. A method as claimed in any one of claims 16 to 18, wherein at least one of said scalable call rate control parameters is assigned to a predetermined called address.

20. A method as claimed in any one of claims 16 to 19, wherein a dial-plan is imposed by the media gateway controller on the media gateway to determine the control treatment applied to at least part of a called address

21. A method as claimed in any one of claims 16 to 20, wherein the media gateway analyses at least a portion of the called address prior to sending any call related indication to the media gateway controller.

22. A method as claimed in any one of claims 16 to 21, wherein the media gateway does not send an off-hook signal to the media gateway controller until the media gateway has analysed at least one digit of the called address.

23. A method as claimed in any one of claims 16 to 22, wherein the media gateway controller sends a dial-plan to the media gateway in advance of the media gateway receiving a call from a user.

24. A method as claimed in any one of claims 16 to 23, wherein the media gateway controller indicates to the media gateway which dial-tone the media gateway should apply to the next call for a specific termination.

5 25. A method as claimed in any one of claims 16 to 24, wherein the call-gap is imposed by the media gateway after the media gateway has analysed the specific called address.

10 26. A network access controller arranged to perform steps in the system of any one of claims 1 to 15.

27. A network access controller as claimed in claim 26, wherein the controller comprises a media gateway controller.

15 28. A network access point arranged to perform steps in the system of any one of claims 1 to 15.

29. A network access point as claimed in claim 28, comprising a media gateway.

20 30. A system as claimed in any of claims 1 to 15, wherein the predetermined local gap interval duration is of the order of a minute.

25 31. A system as claimed in any of claims 1 to 15, wherein each network access point determines the initial gap using a probabilistic method.

32. A system as claimed in any of claims 1 to 15, wherein the initial gap duration, if not zero, is determined by each network access point such that all of the network access points' initial gap durations are uniformly distributed in the range from zero to the local gap interval Δt determined by each network access point.

ABSTRACT

OVERLOAD CONTROL IN A COMMUNICATIONS NETWORK

5 An adaptive overload system for controlling the amount of traffic processed by a network access controller is described for a network access controller arranged to control a plurality of network access points. Each network access point provides traffic with access to the communications network and the system comprises determining at the network access controller if an overload condition exists, and if so, generating at
10 least one global constraint to restrict the rate at which a network access point admits said traffic to the communications network. The controller then multicasts at least one global traffic constraint to one or more of said plurality of network access points. Each network access point receiving the global constraint then processes the global traffic constraint to determine a plurality of local constraint conditions. The receiving network
15 access point performs the following steps to determine said local constraint conditions: determining a local predetermined gap interval to be imposed on said traffic; and determining an initial gap interval which differs from the subsequent local predetermined gap intervals, the initial gap intervals differing between each of said plurality of network access points. The initial gap intervals are determined in either a
20 random or pseudo-random manner to ensure synchronisation effects at the network access controller which would otherwise occur in high call rate scenarios are removed.

Figure (6)



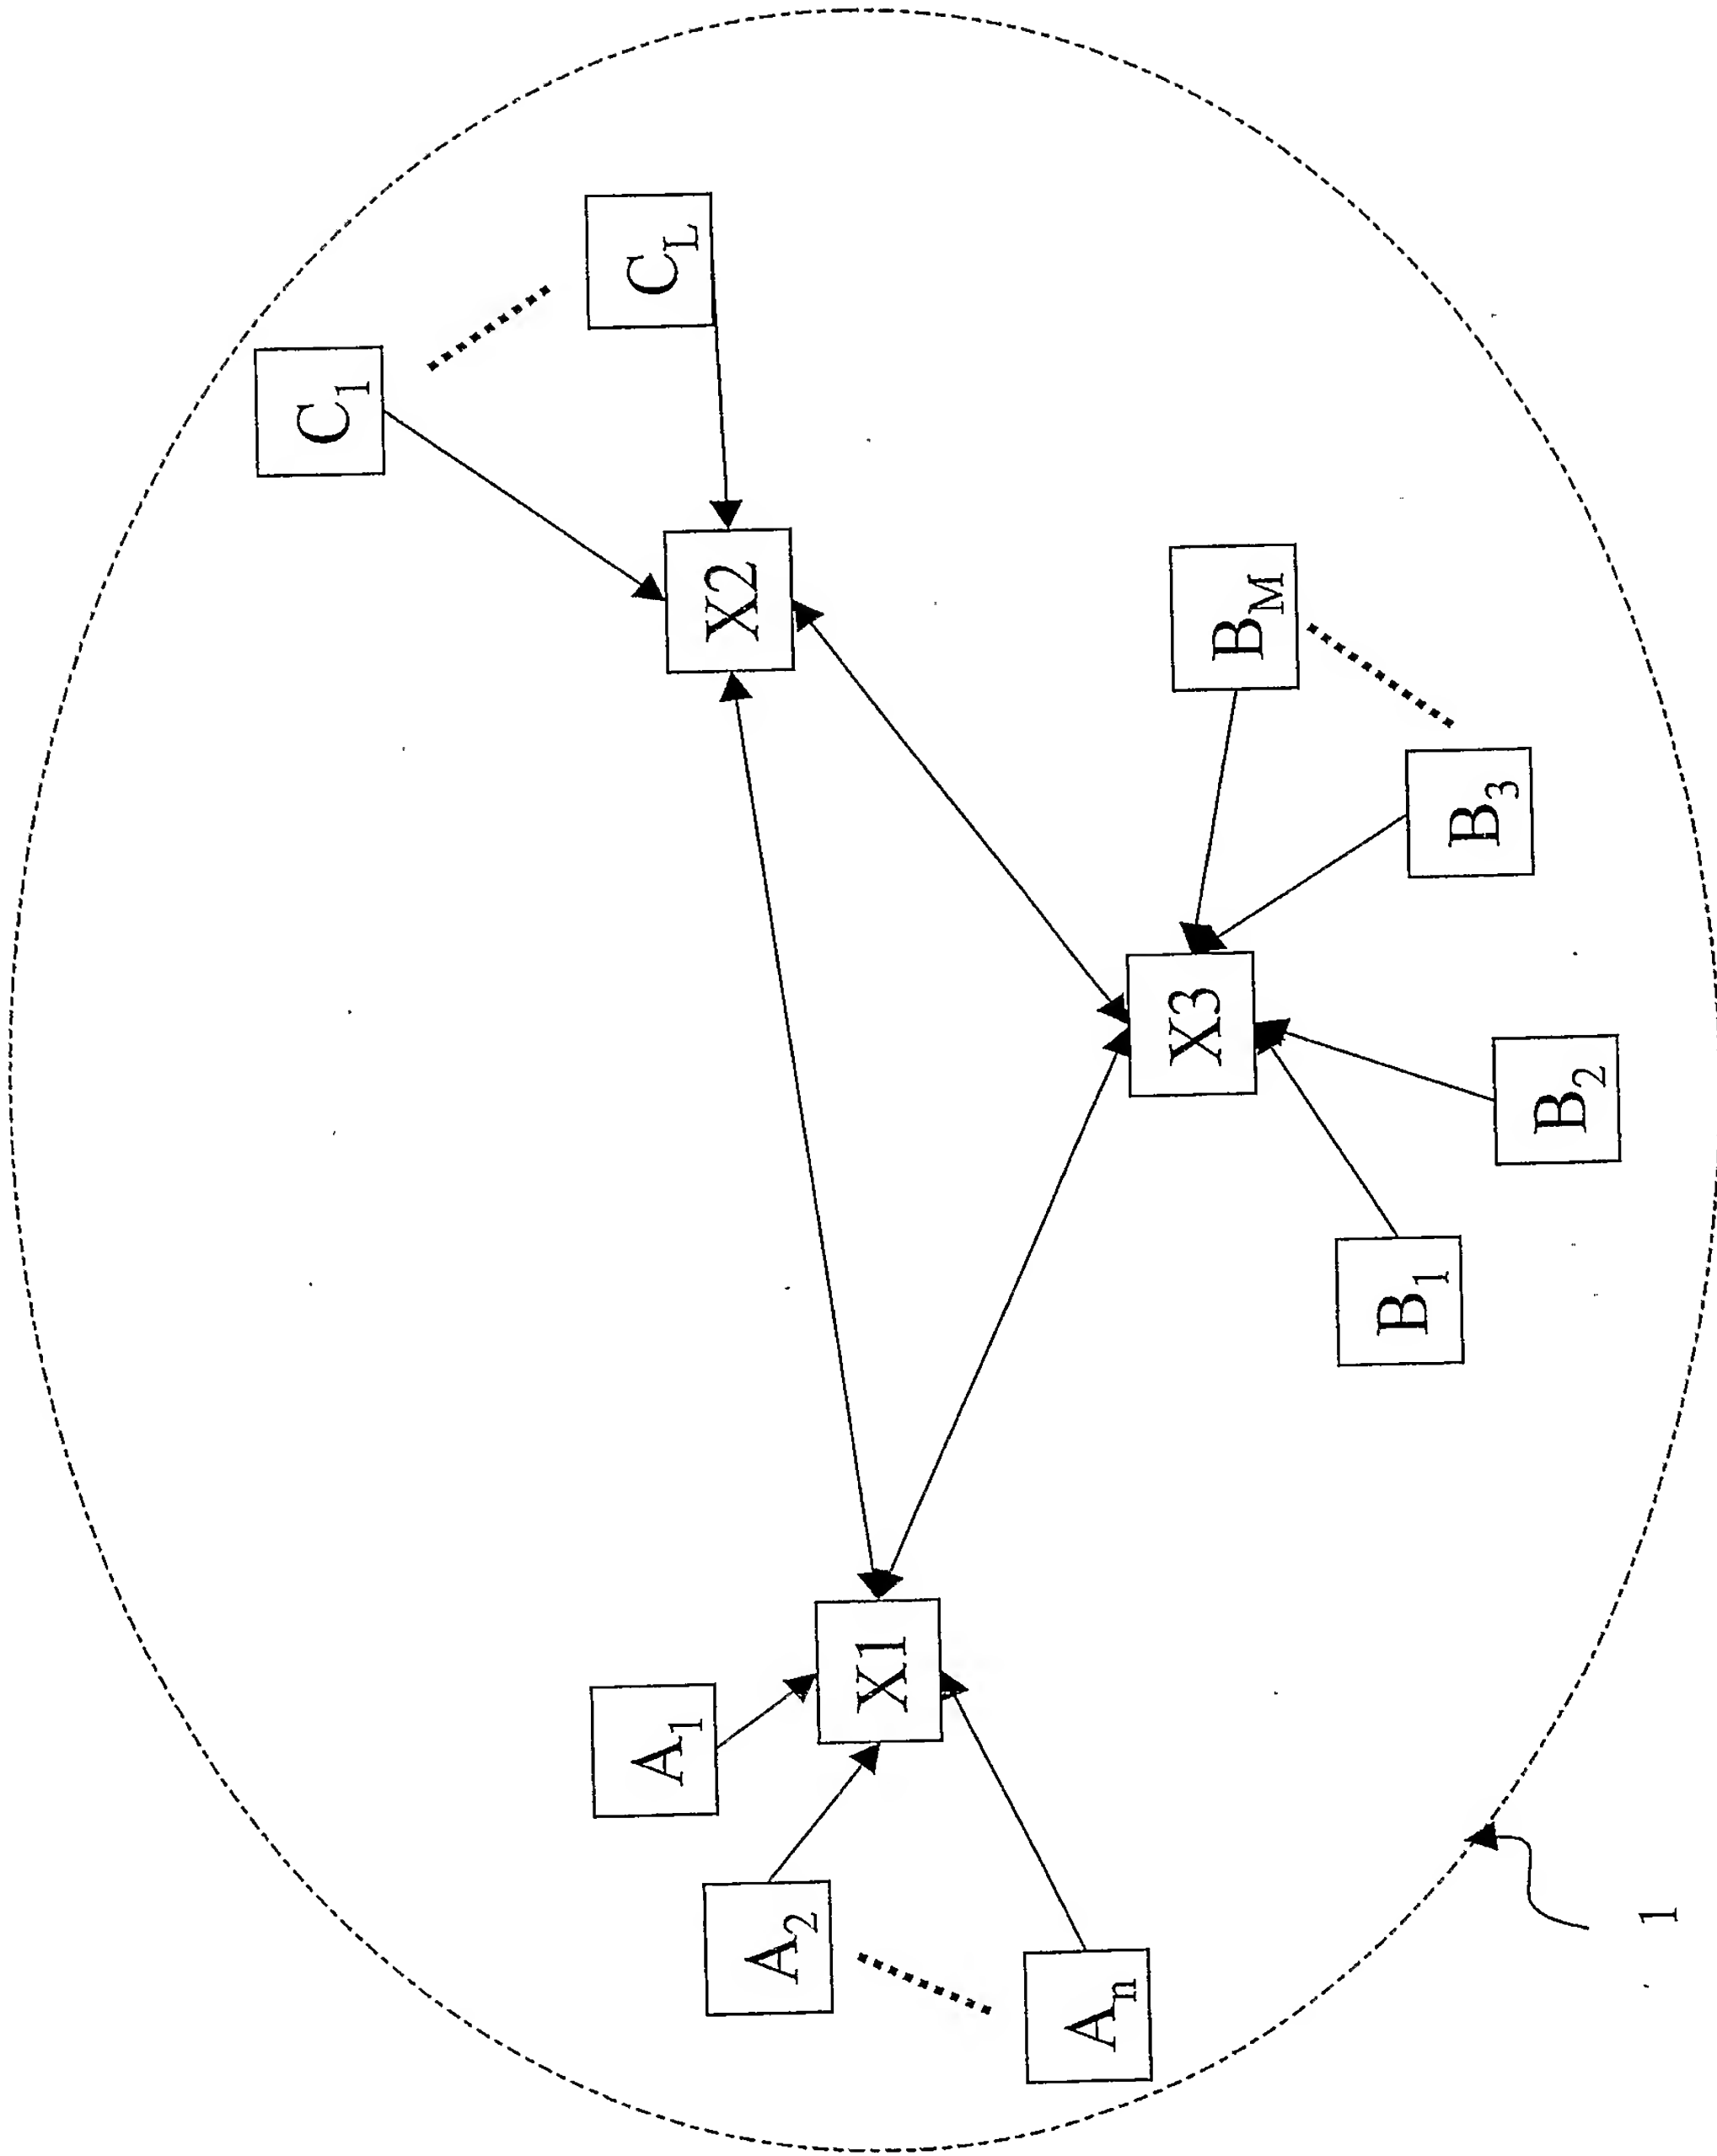


FIGURE 1



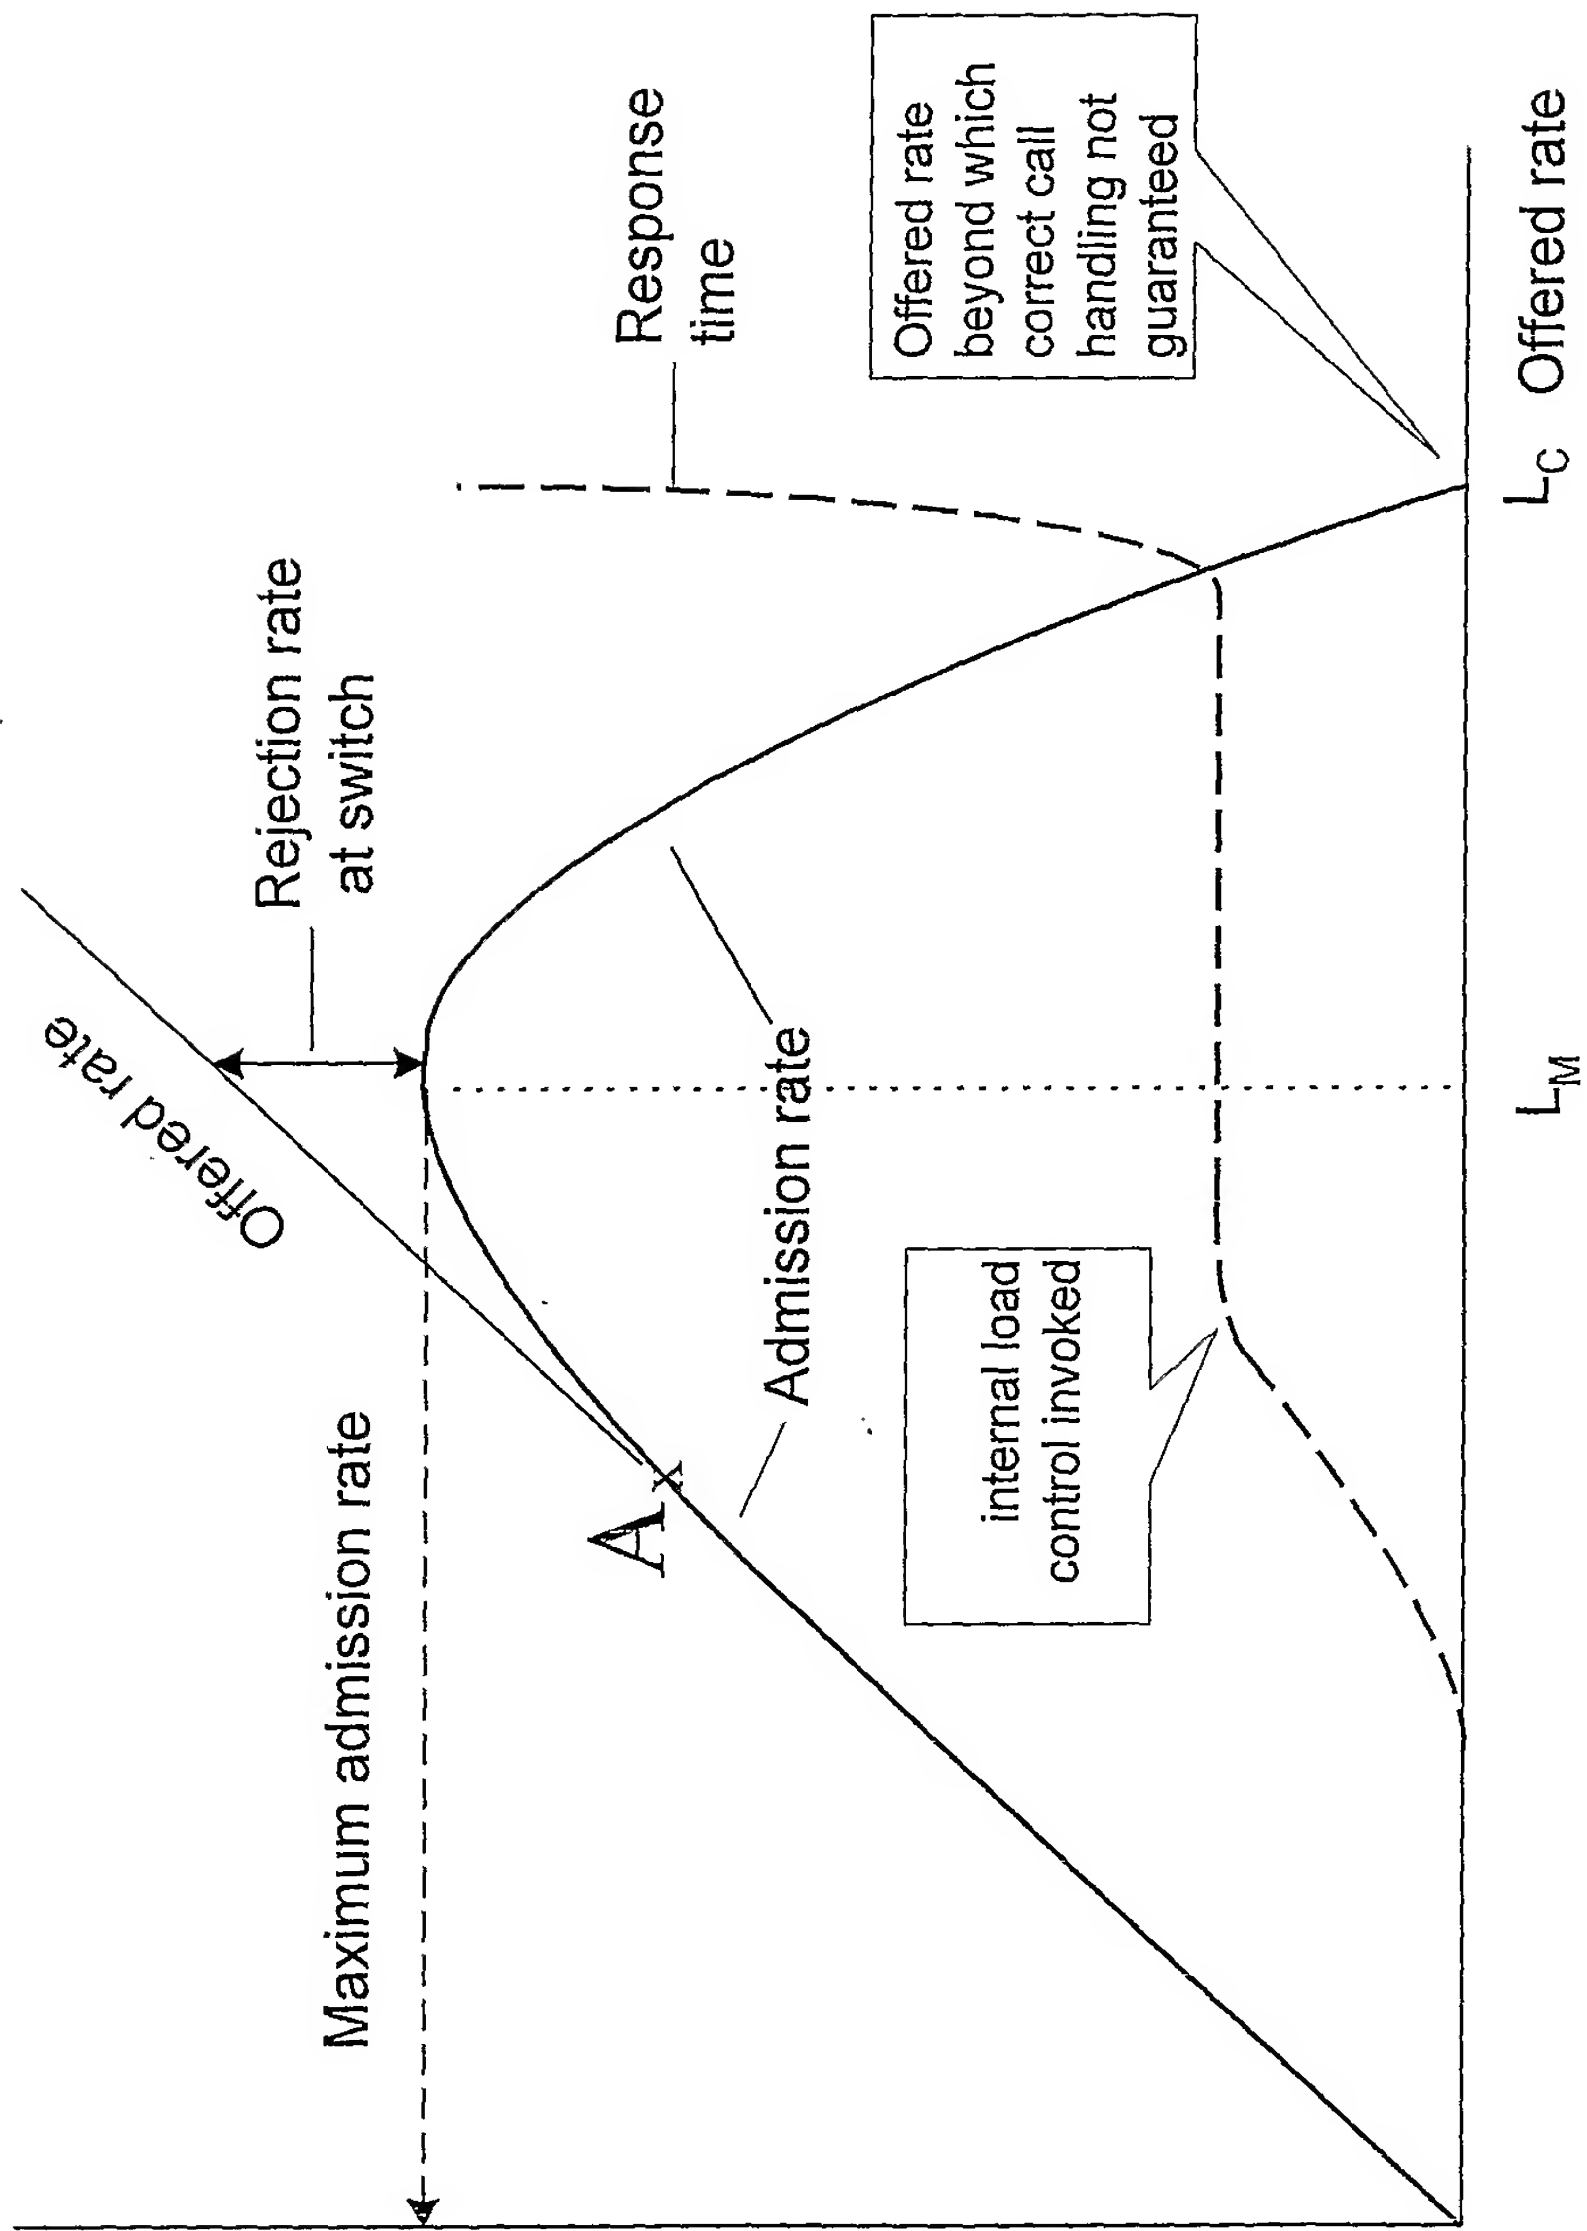


FIGURE 2



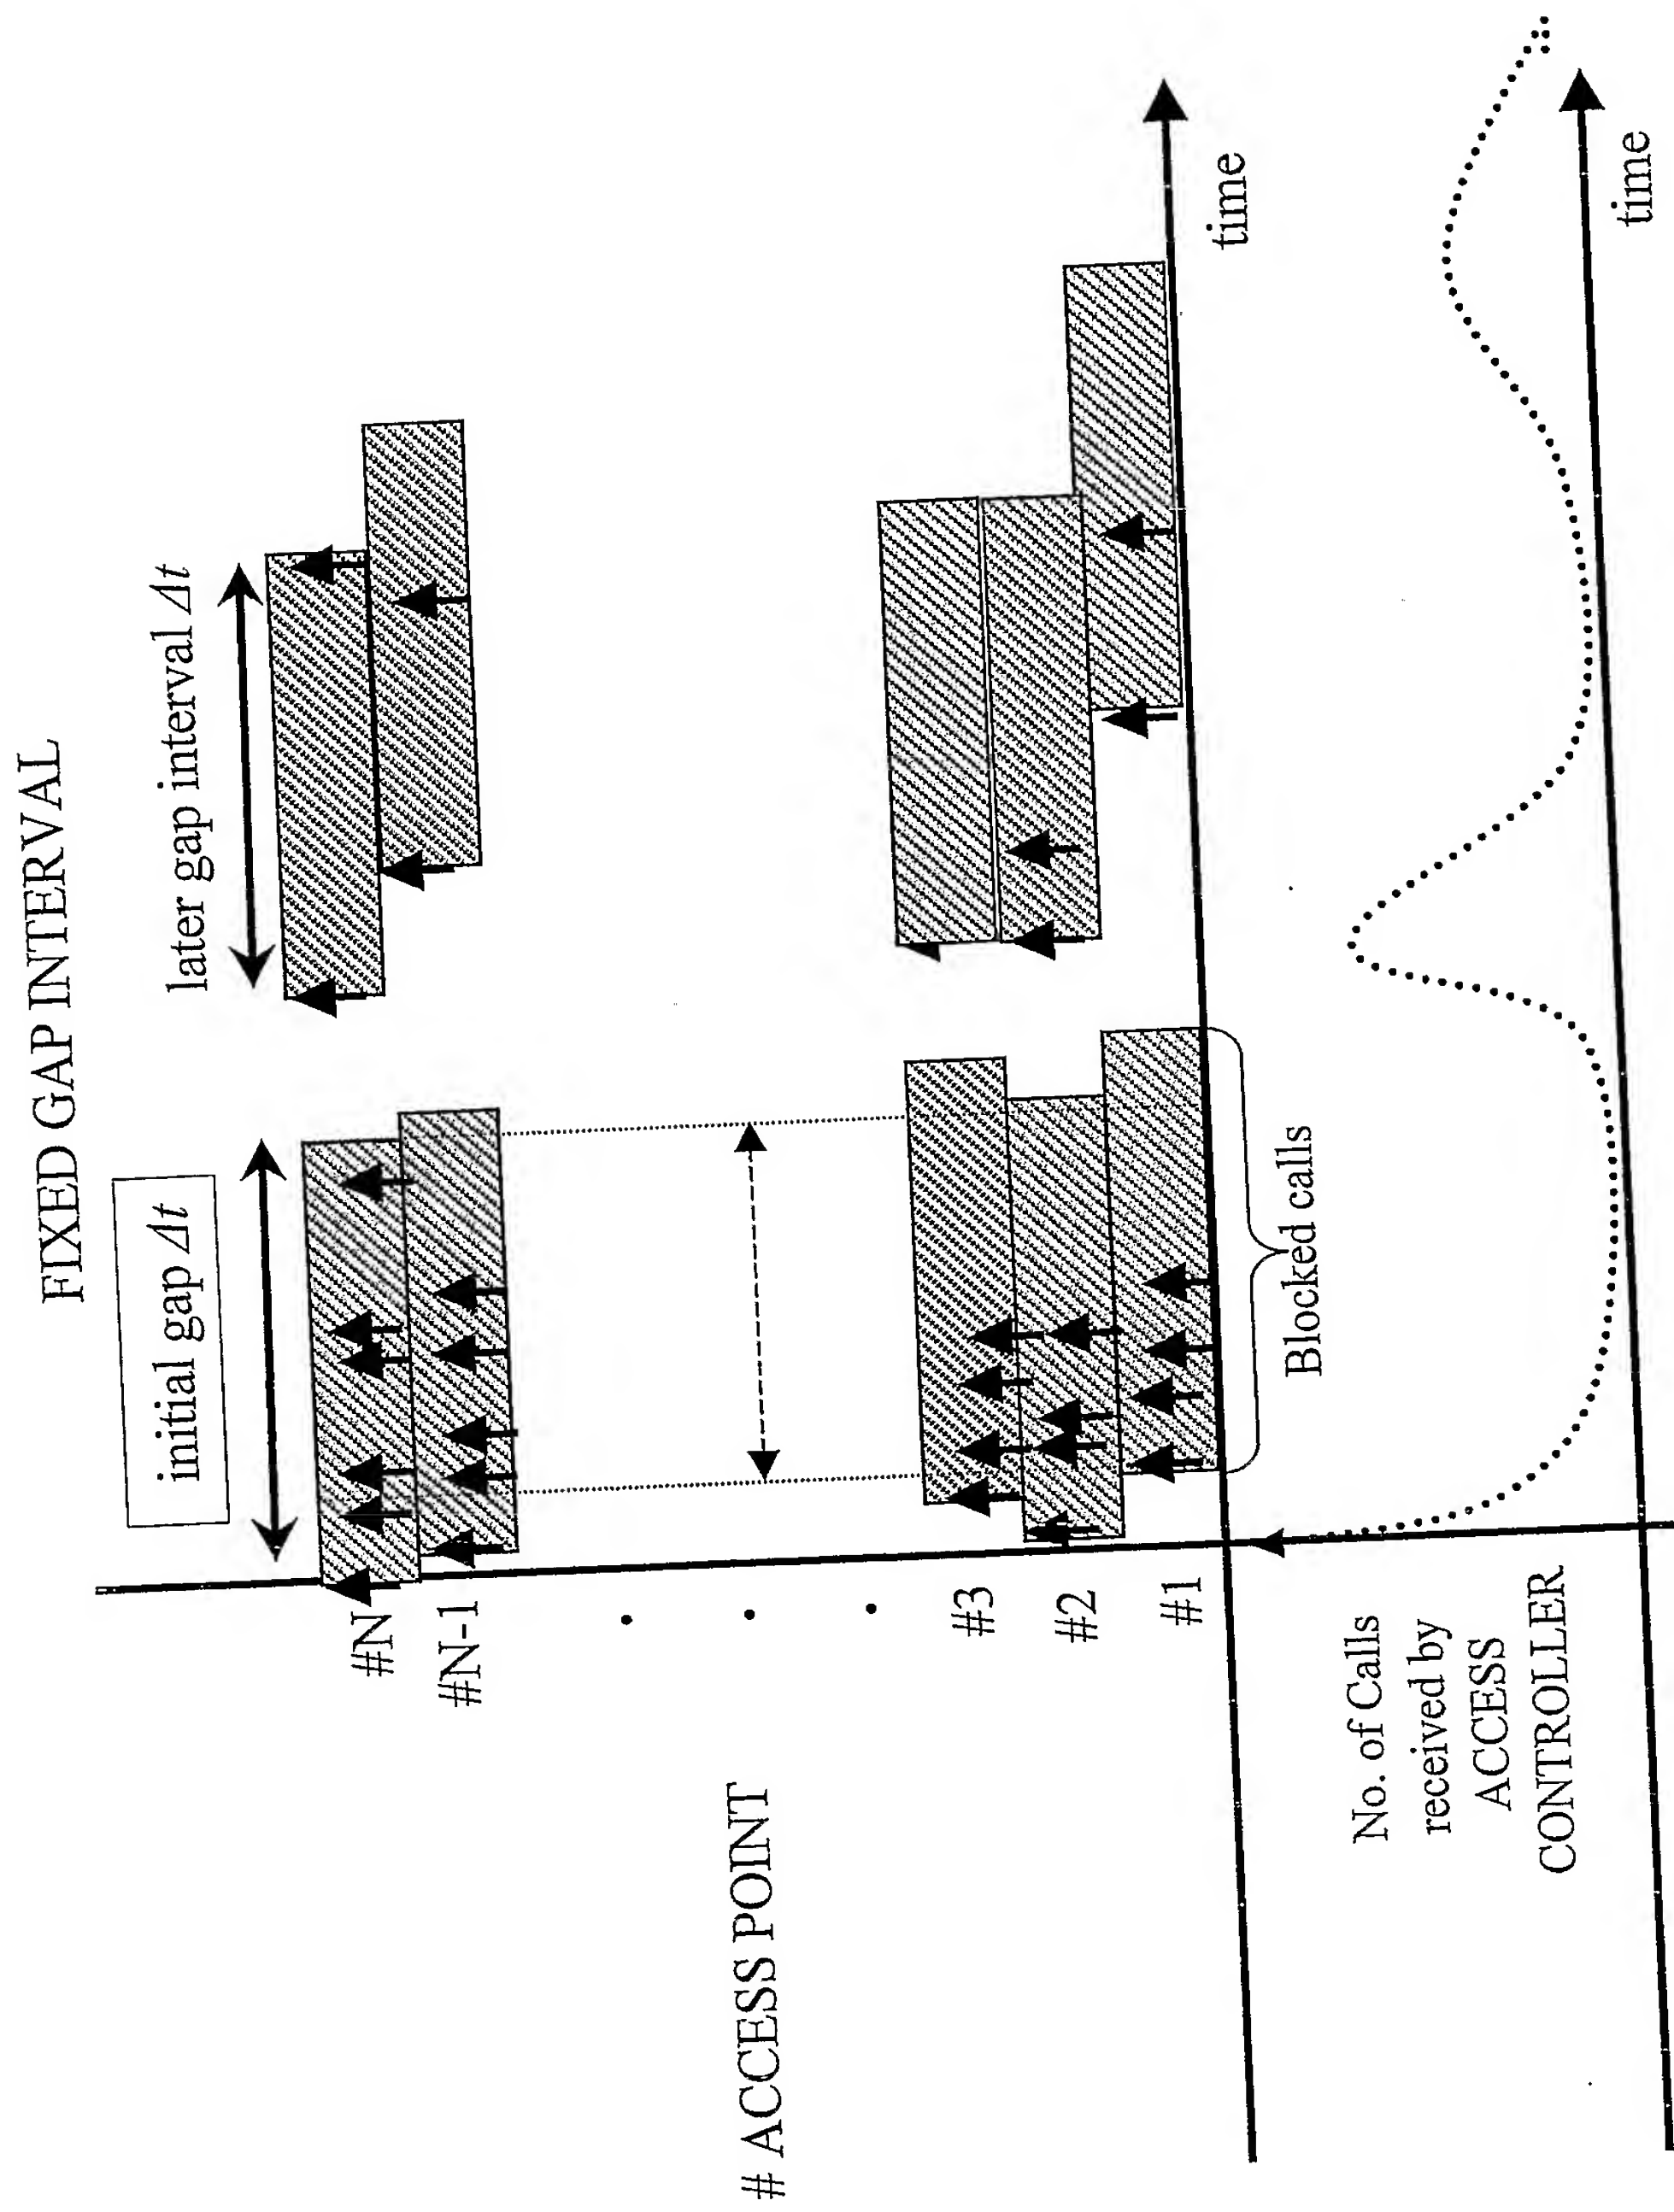


FIGURE 3



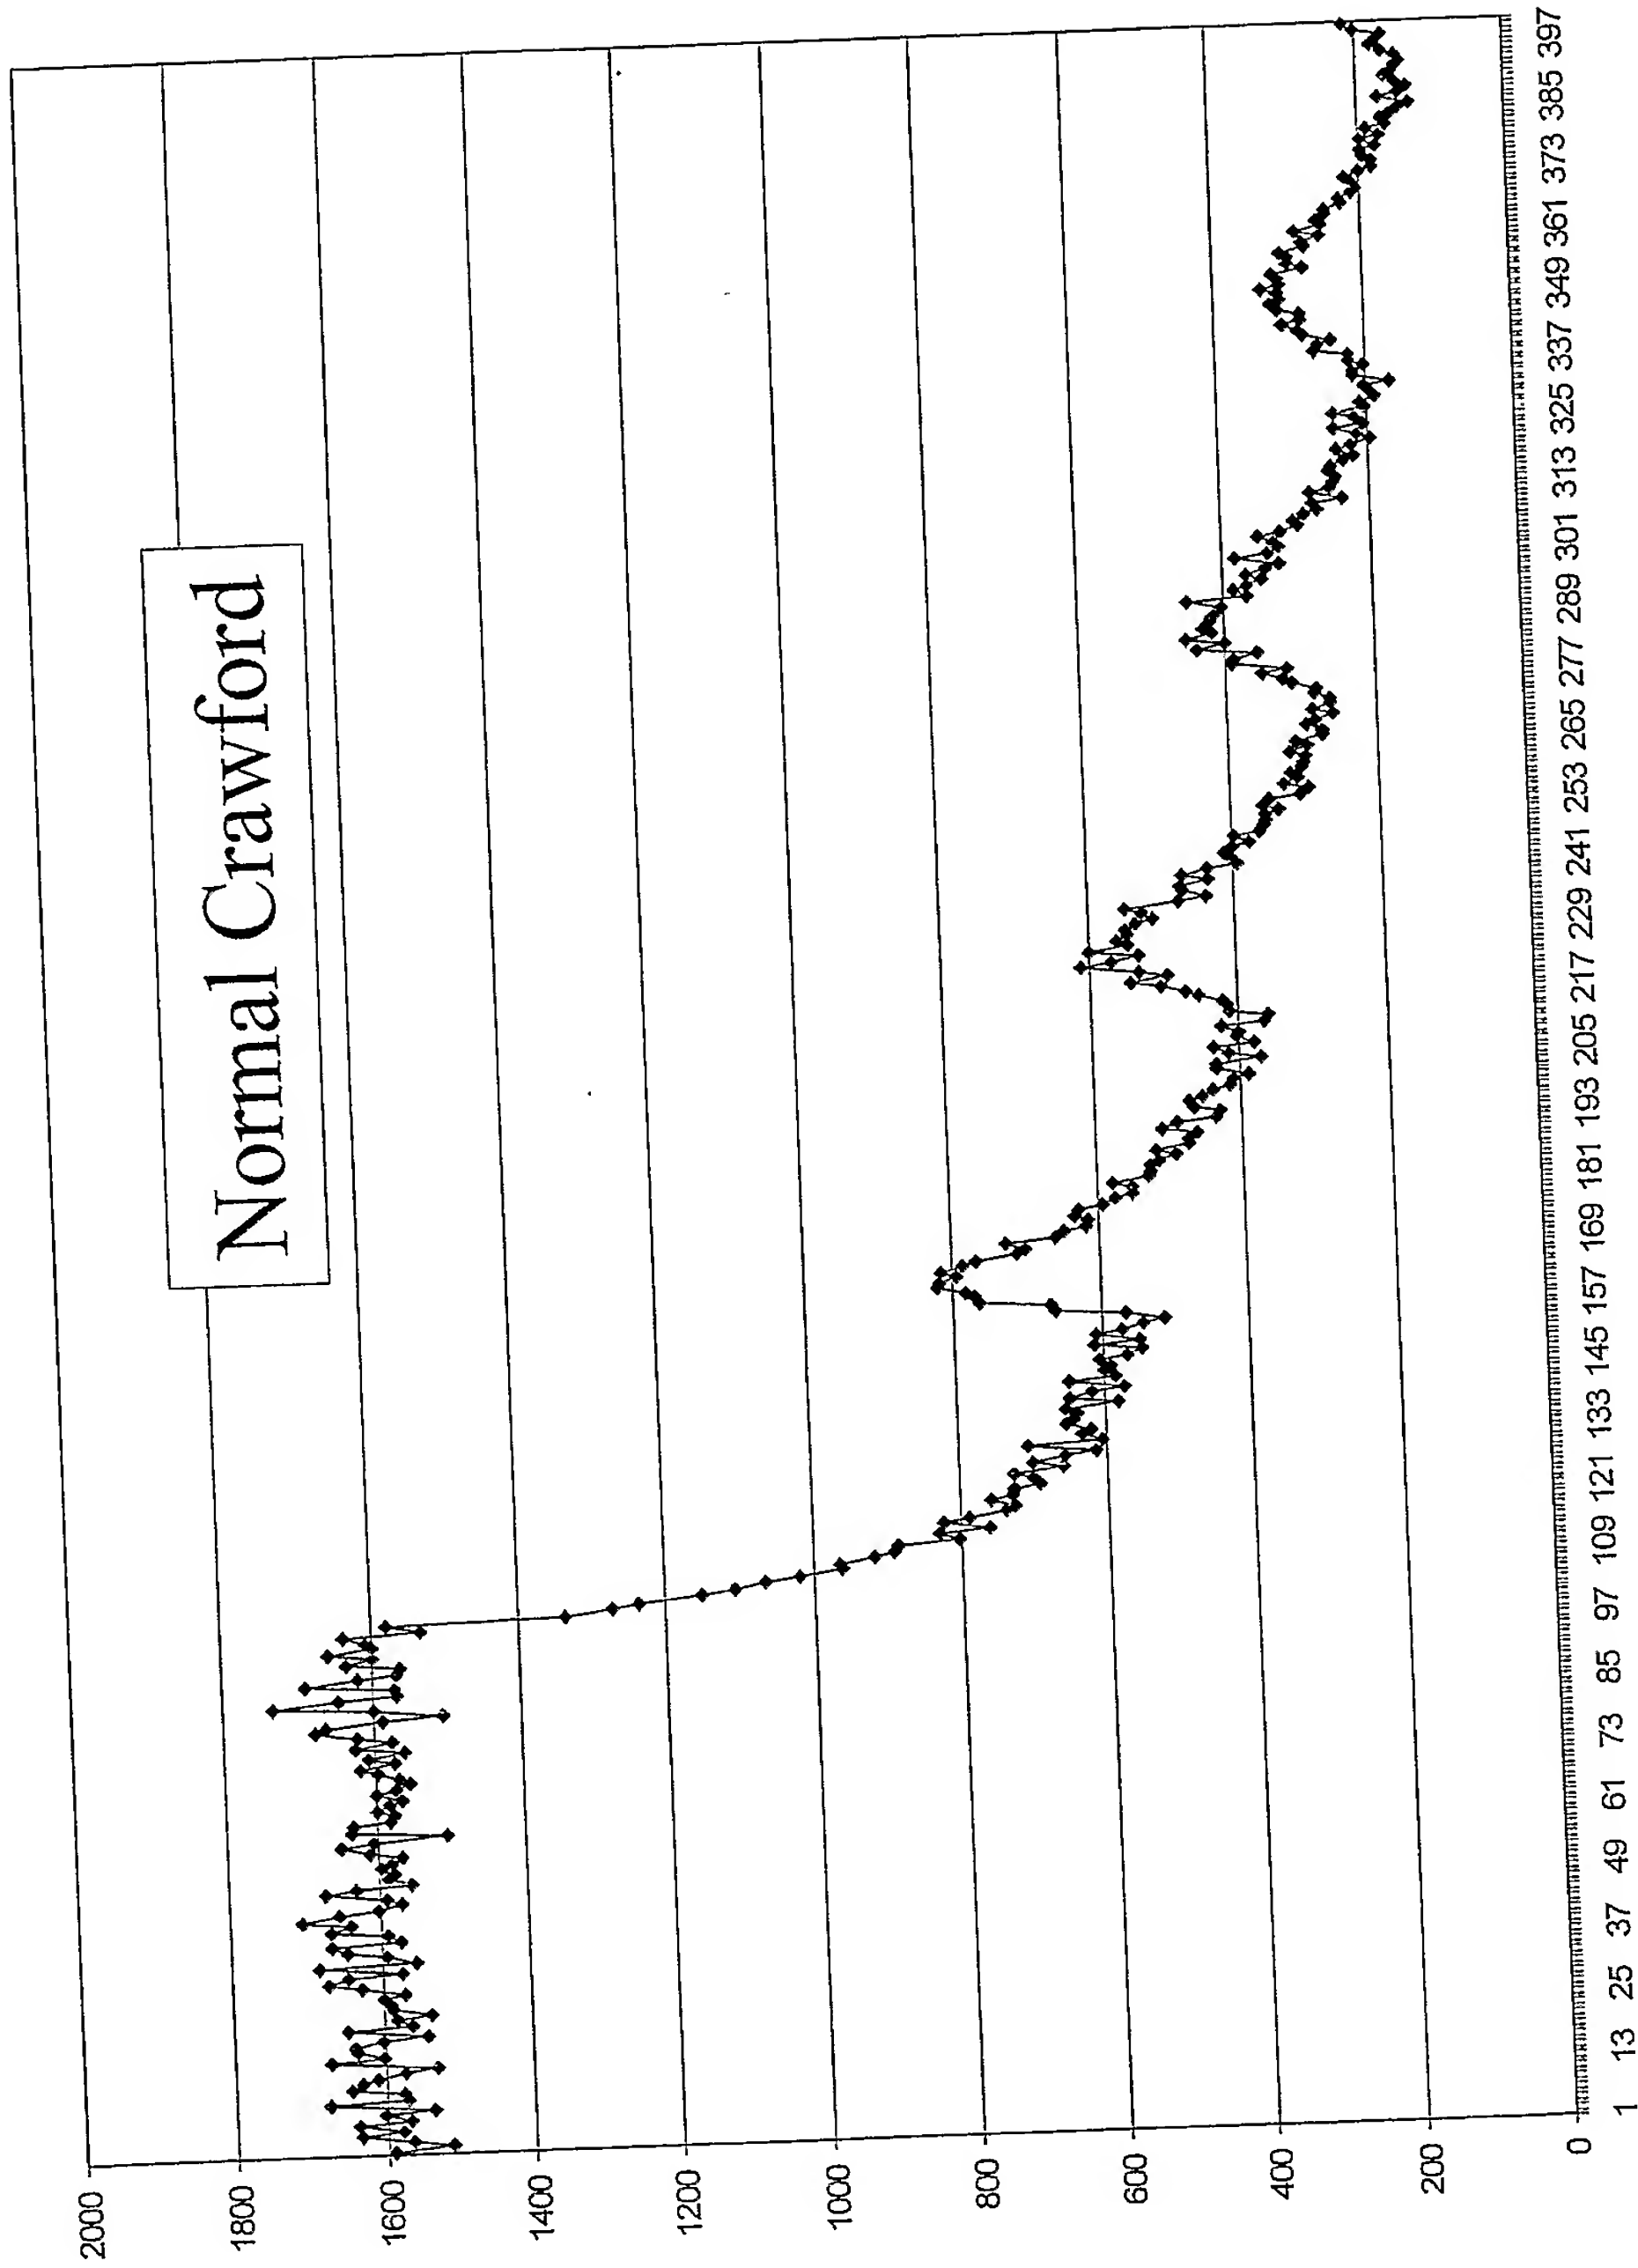


FIGURE 4



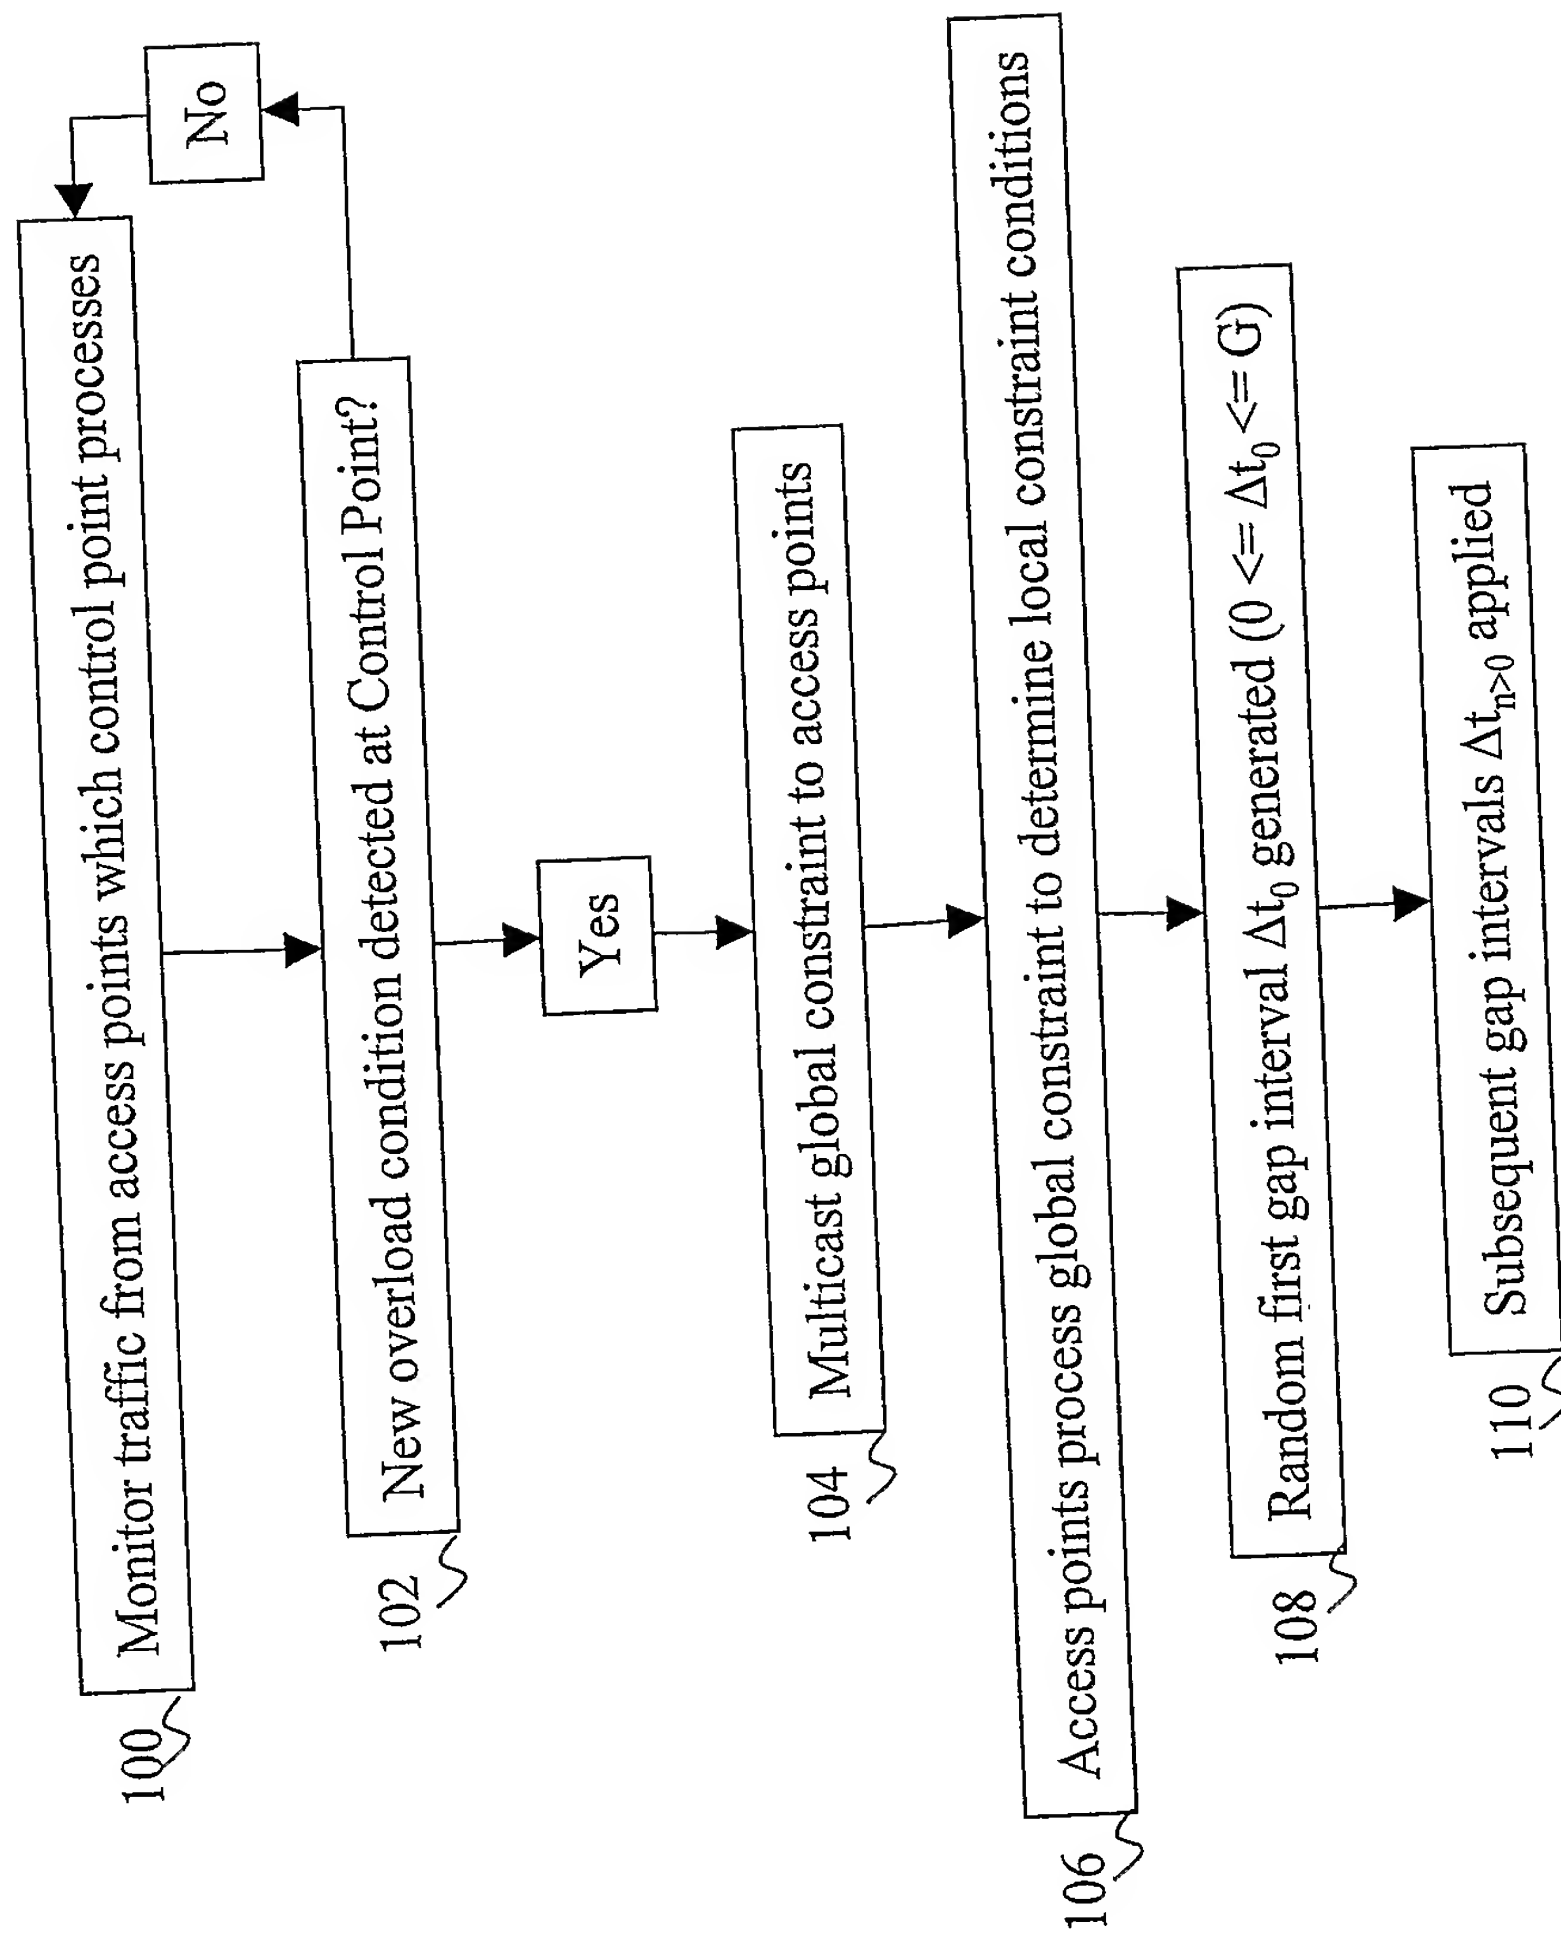


FIGURE 5


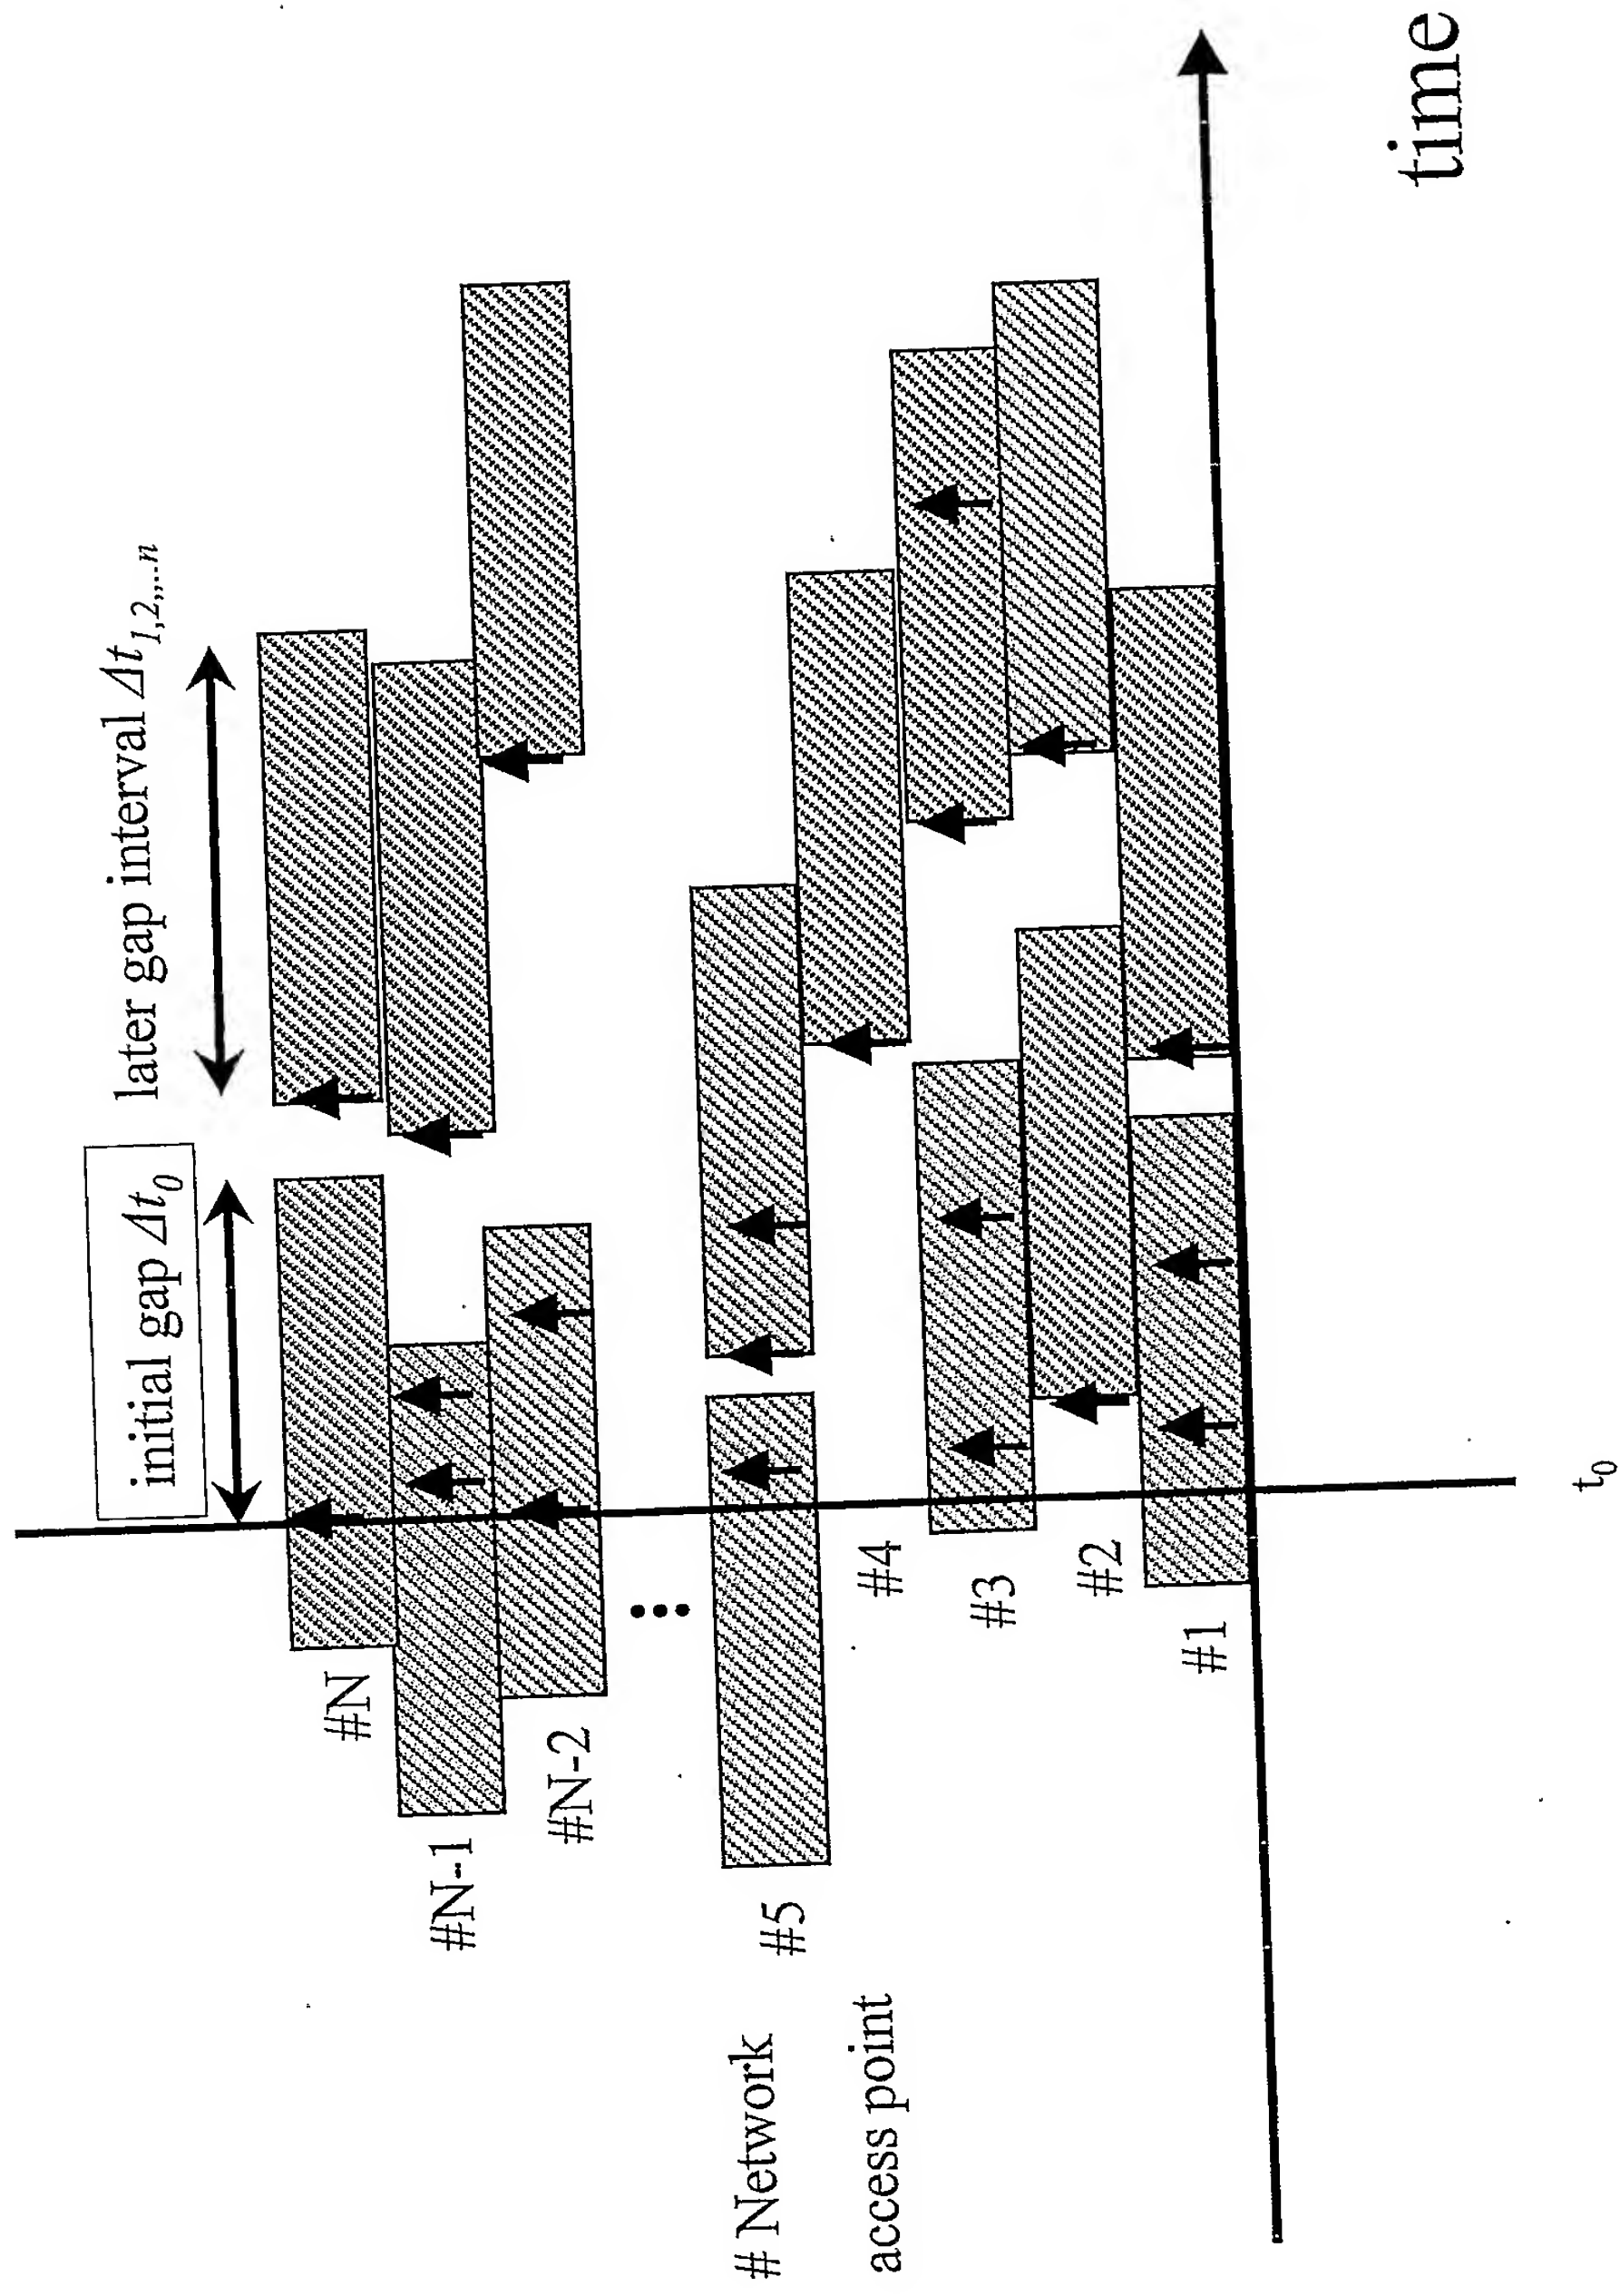


FIGURE 6



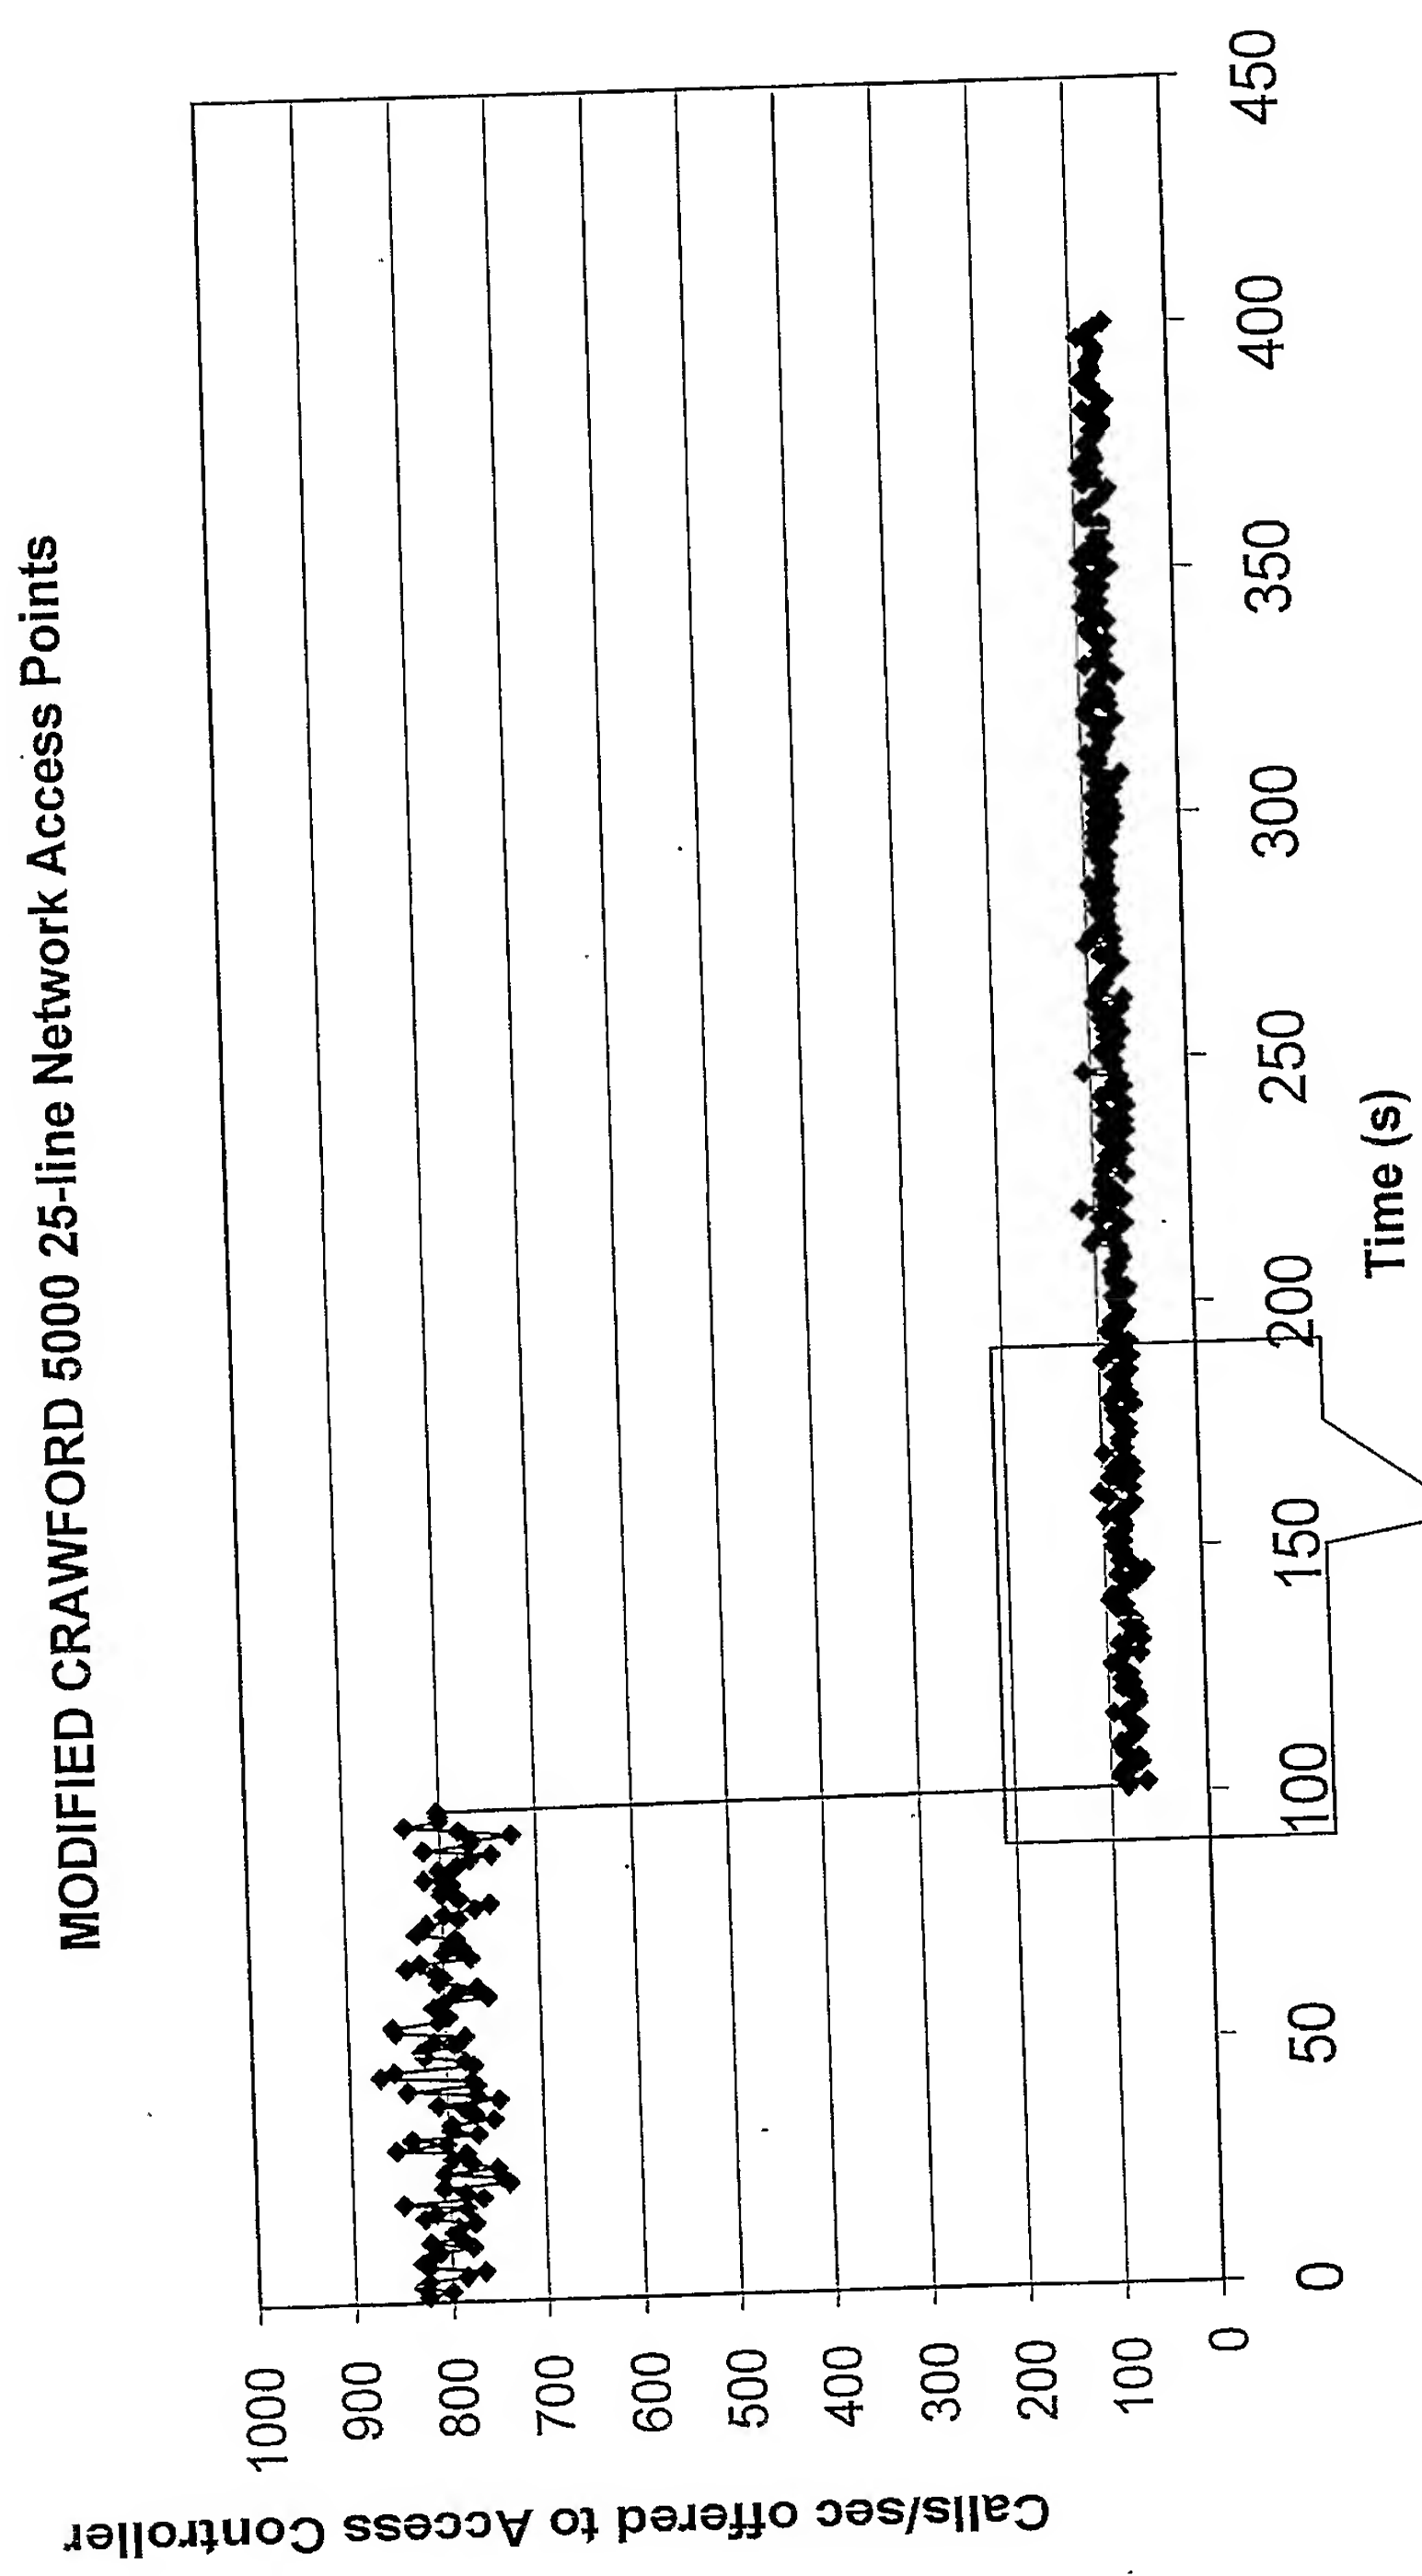

see Fig. 8

FIGURE 7

8/14

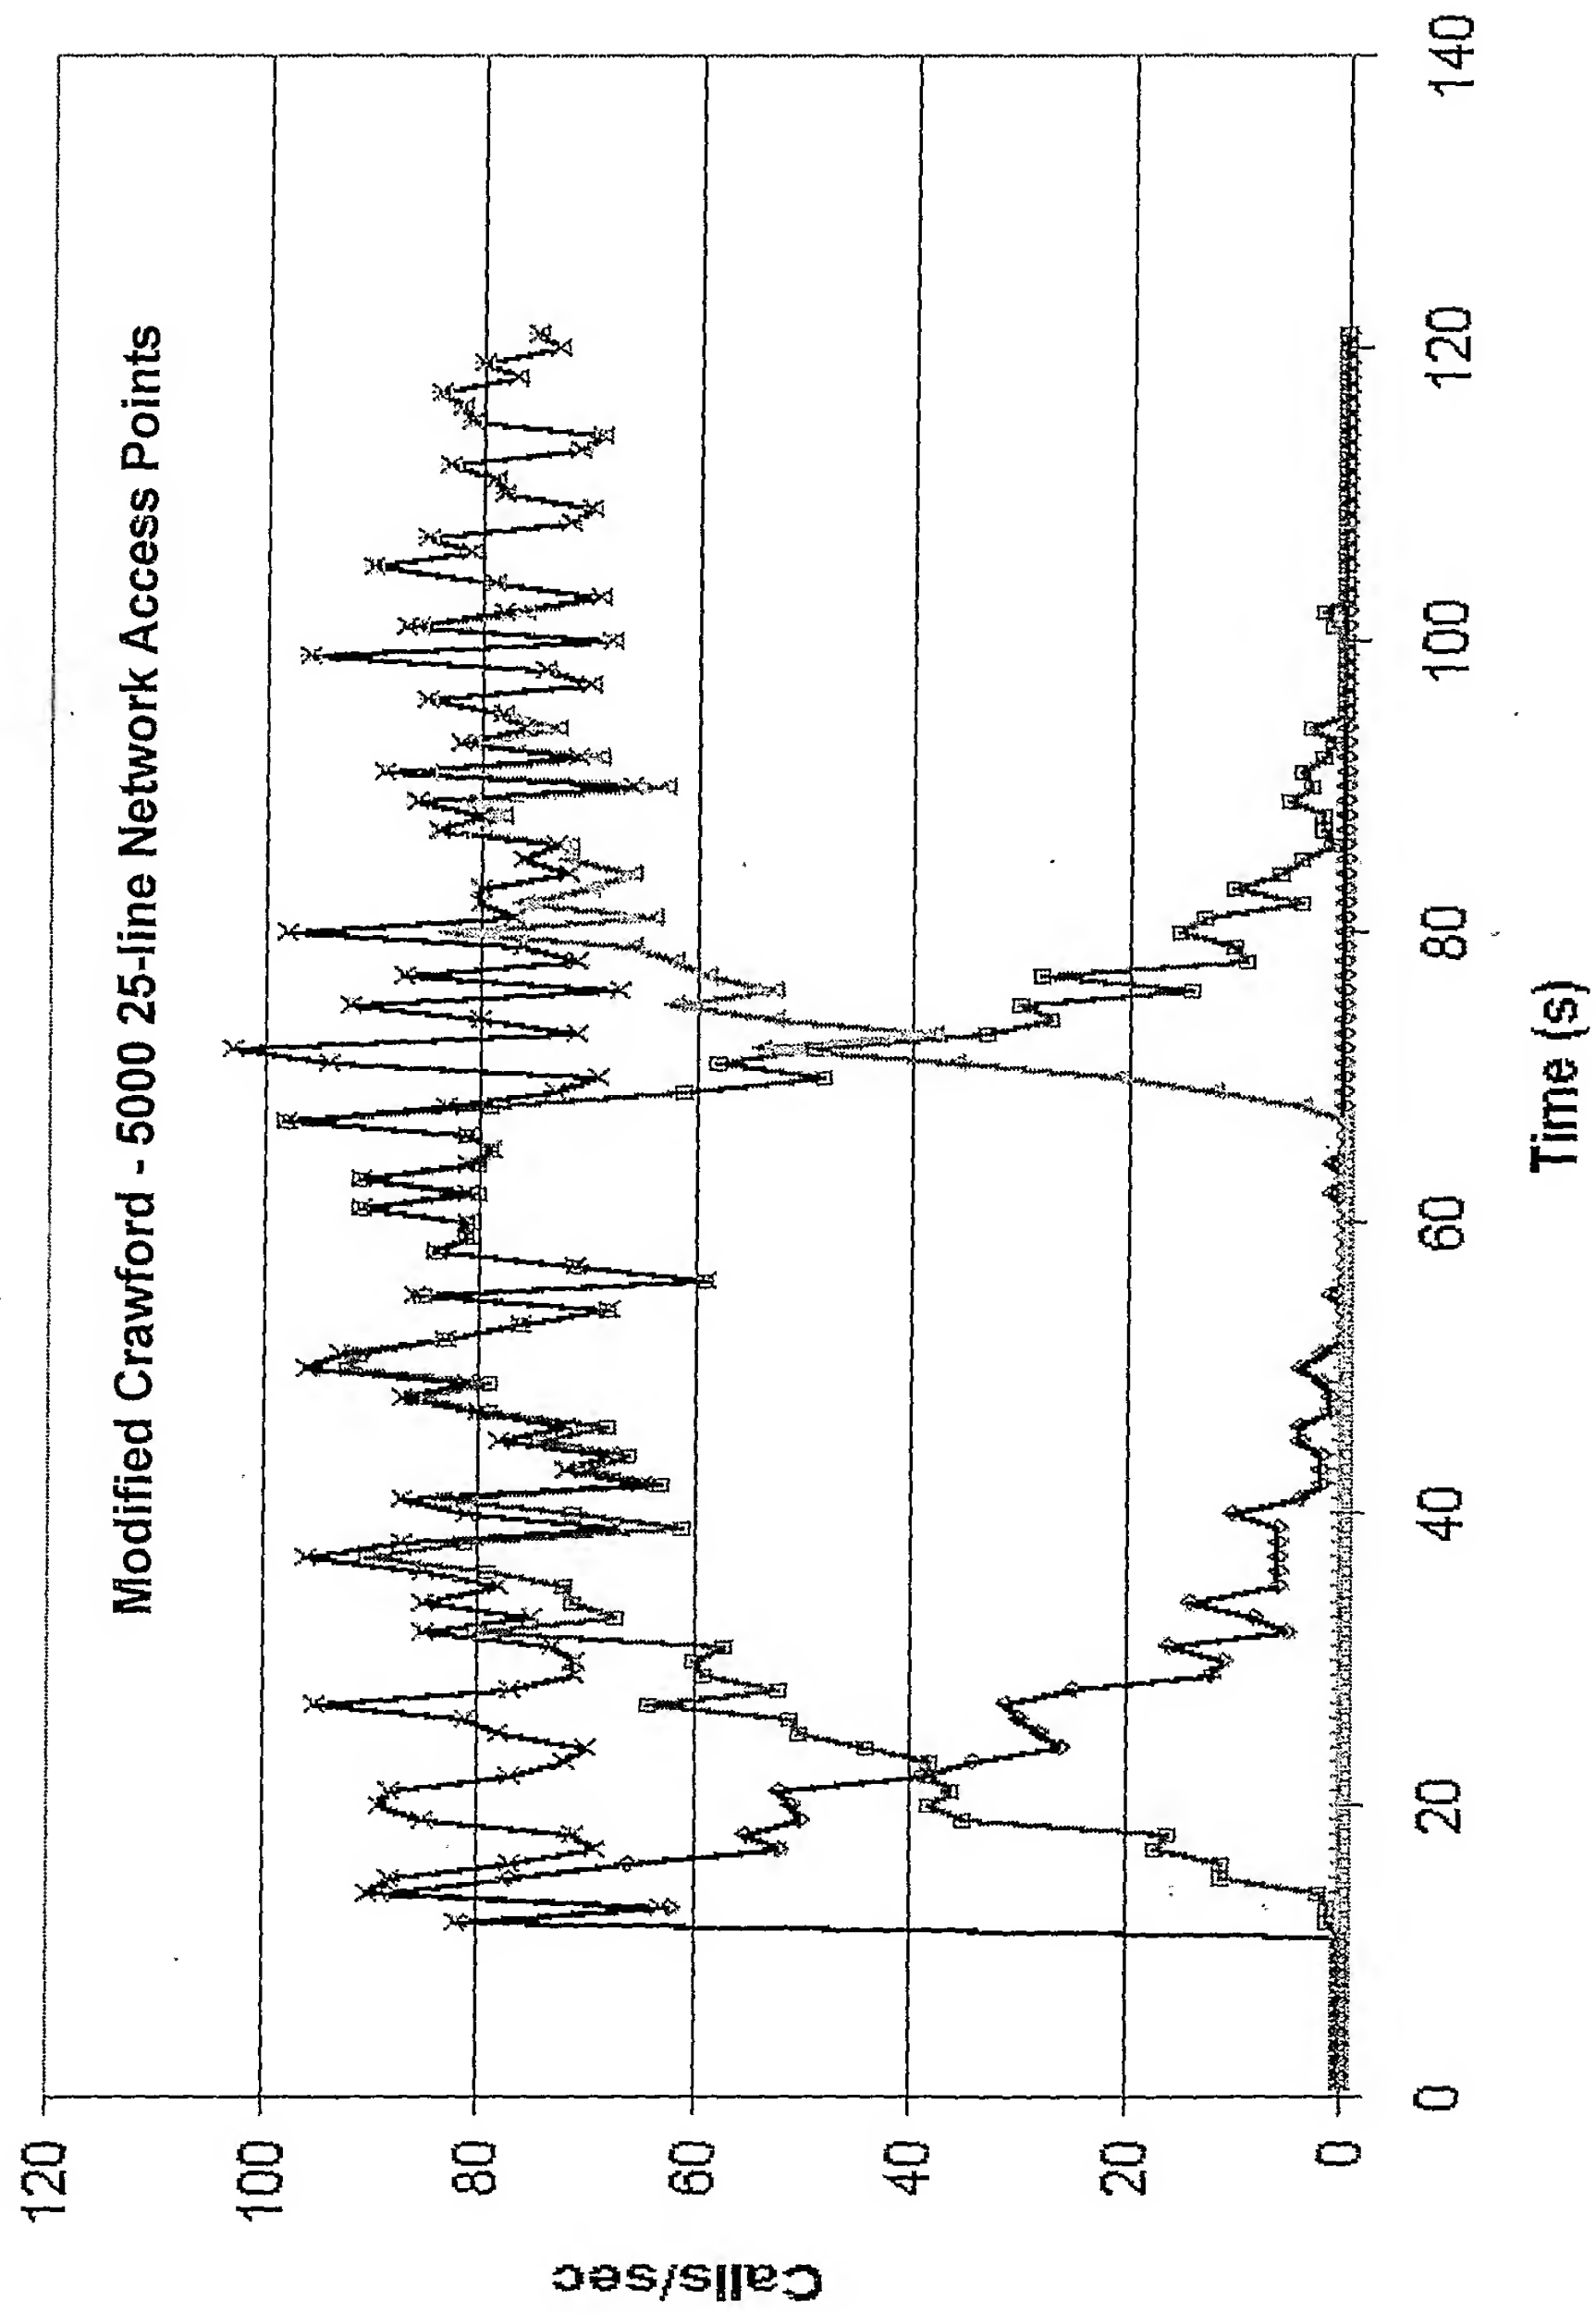


FIGURE 8



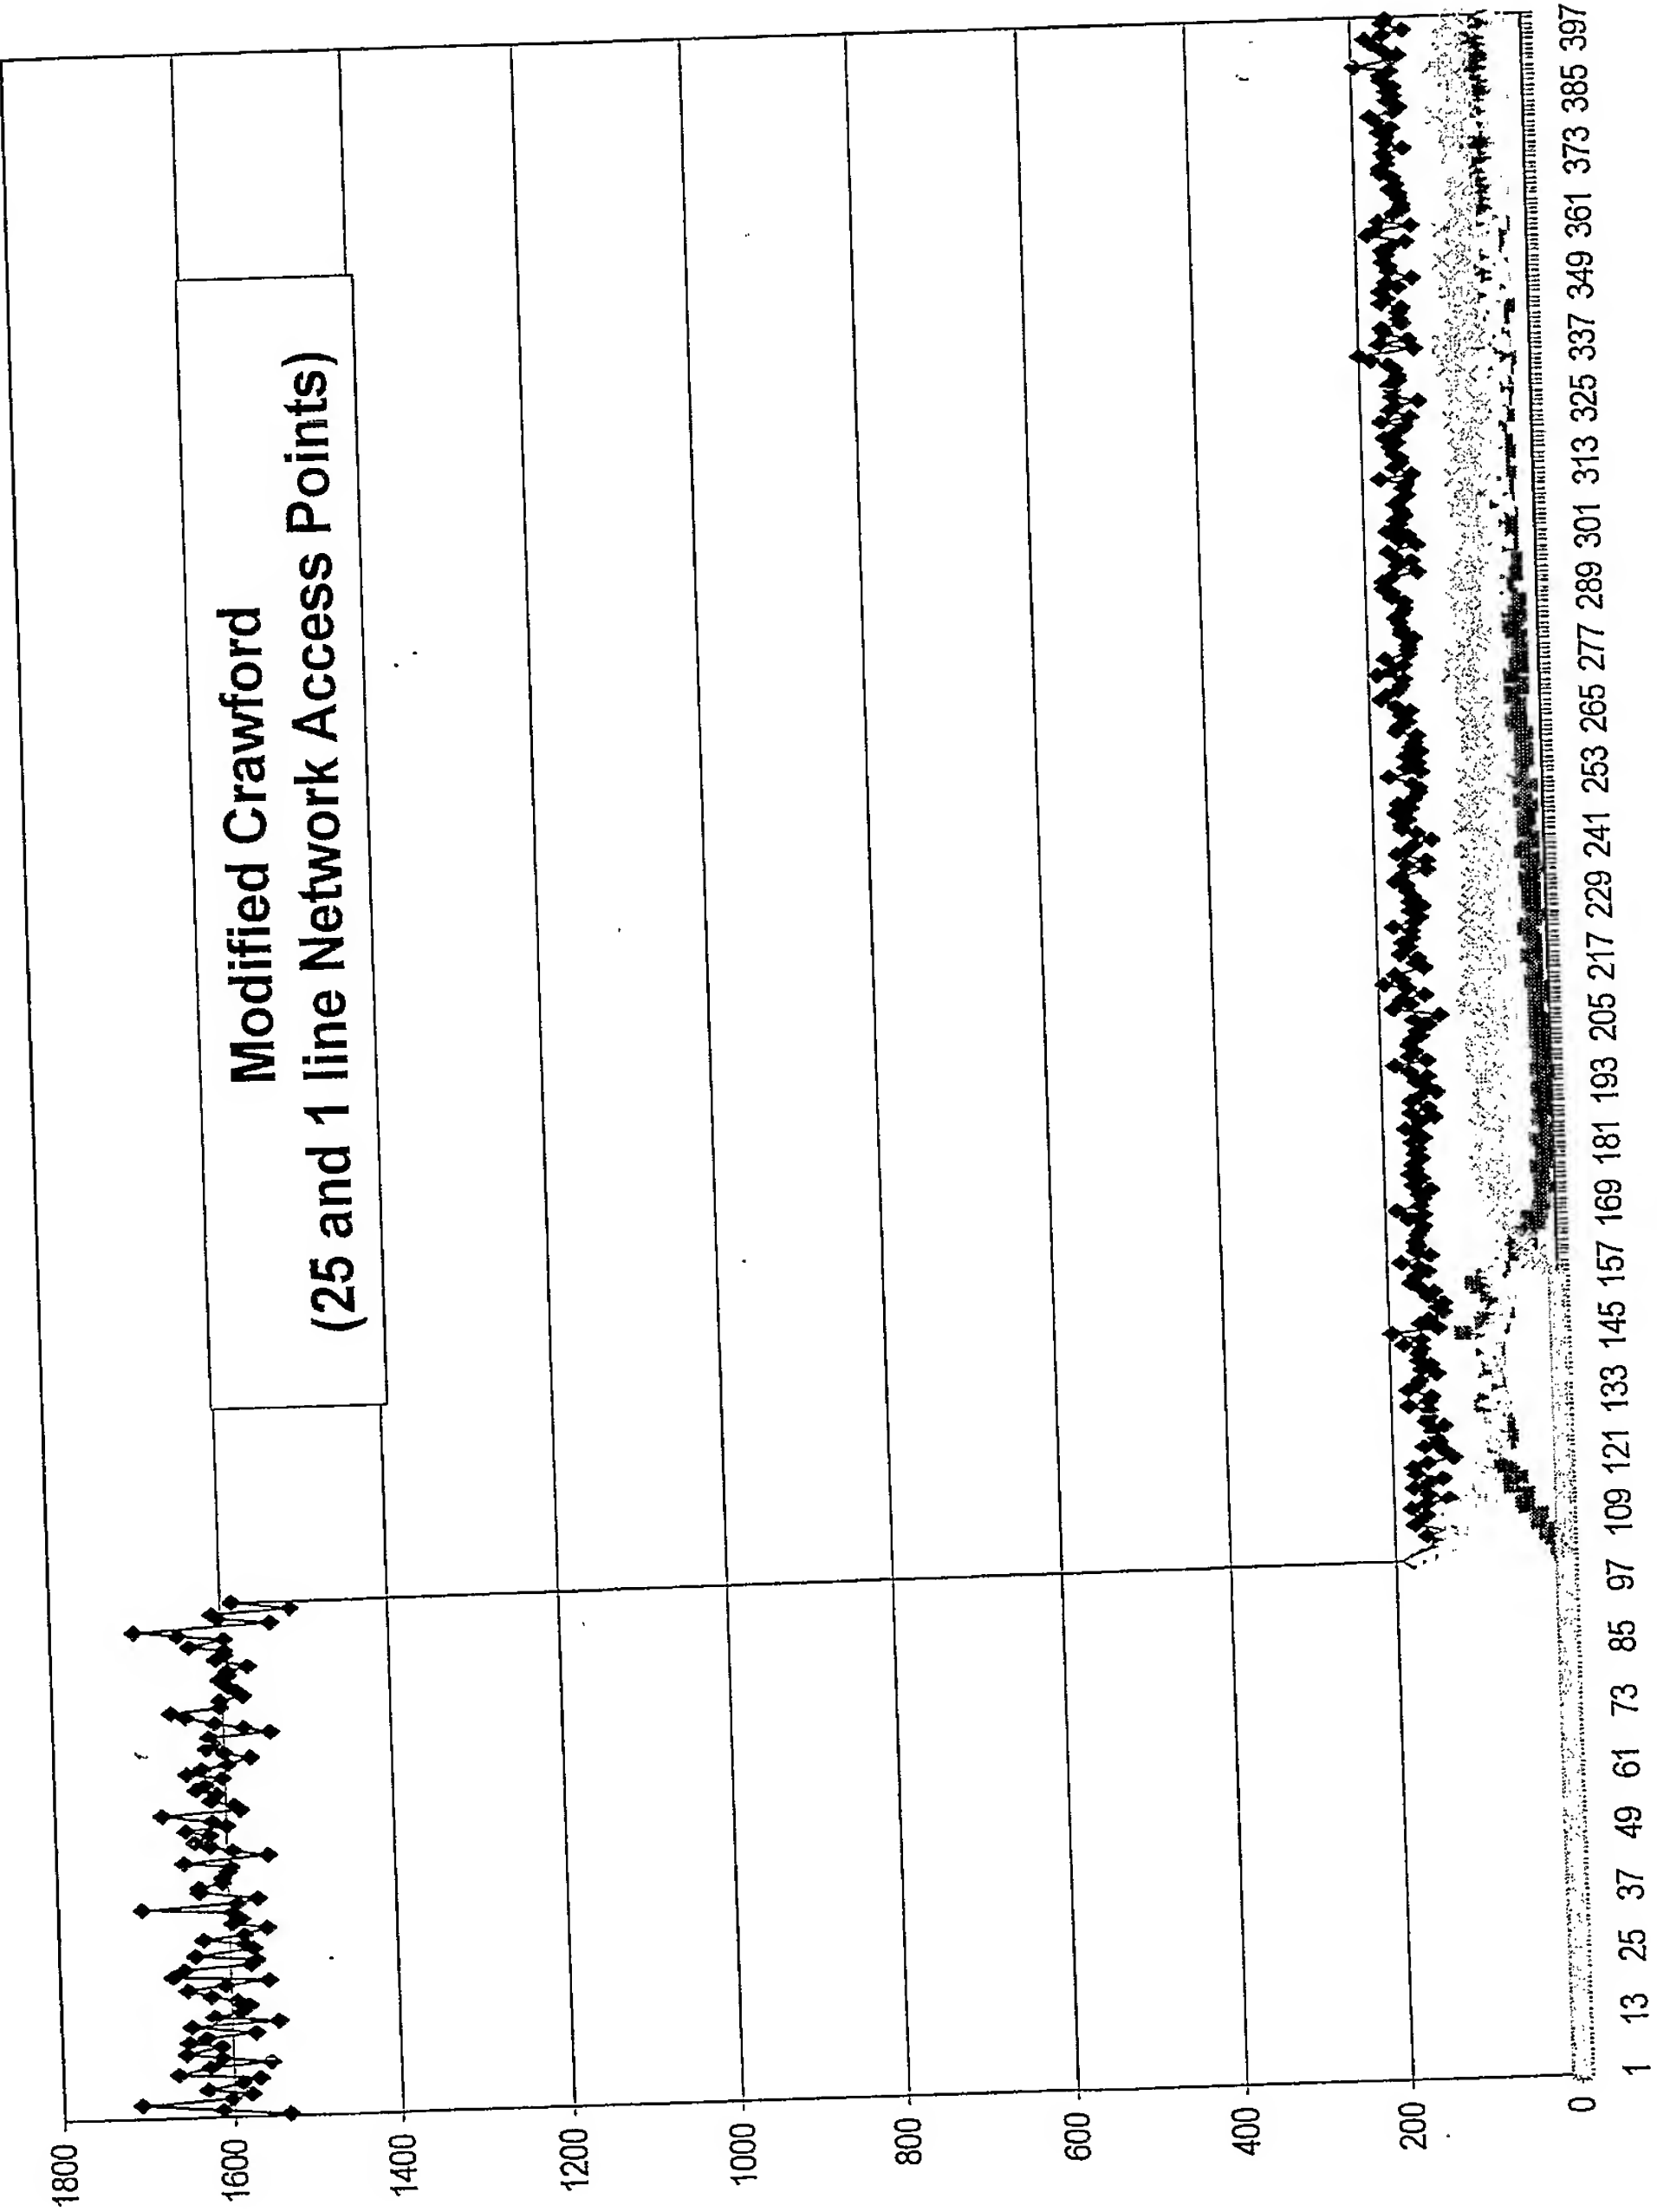


FIGURE 9

Modified Crawford - 25 line & single line Network Access Points

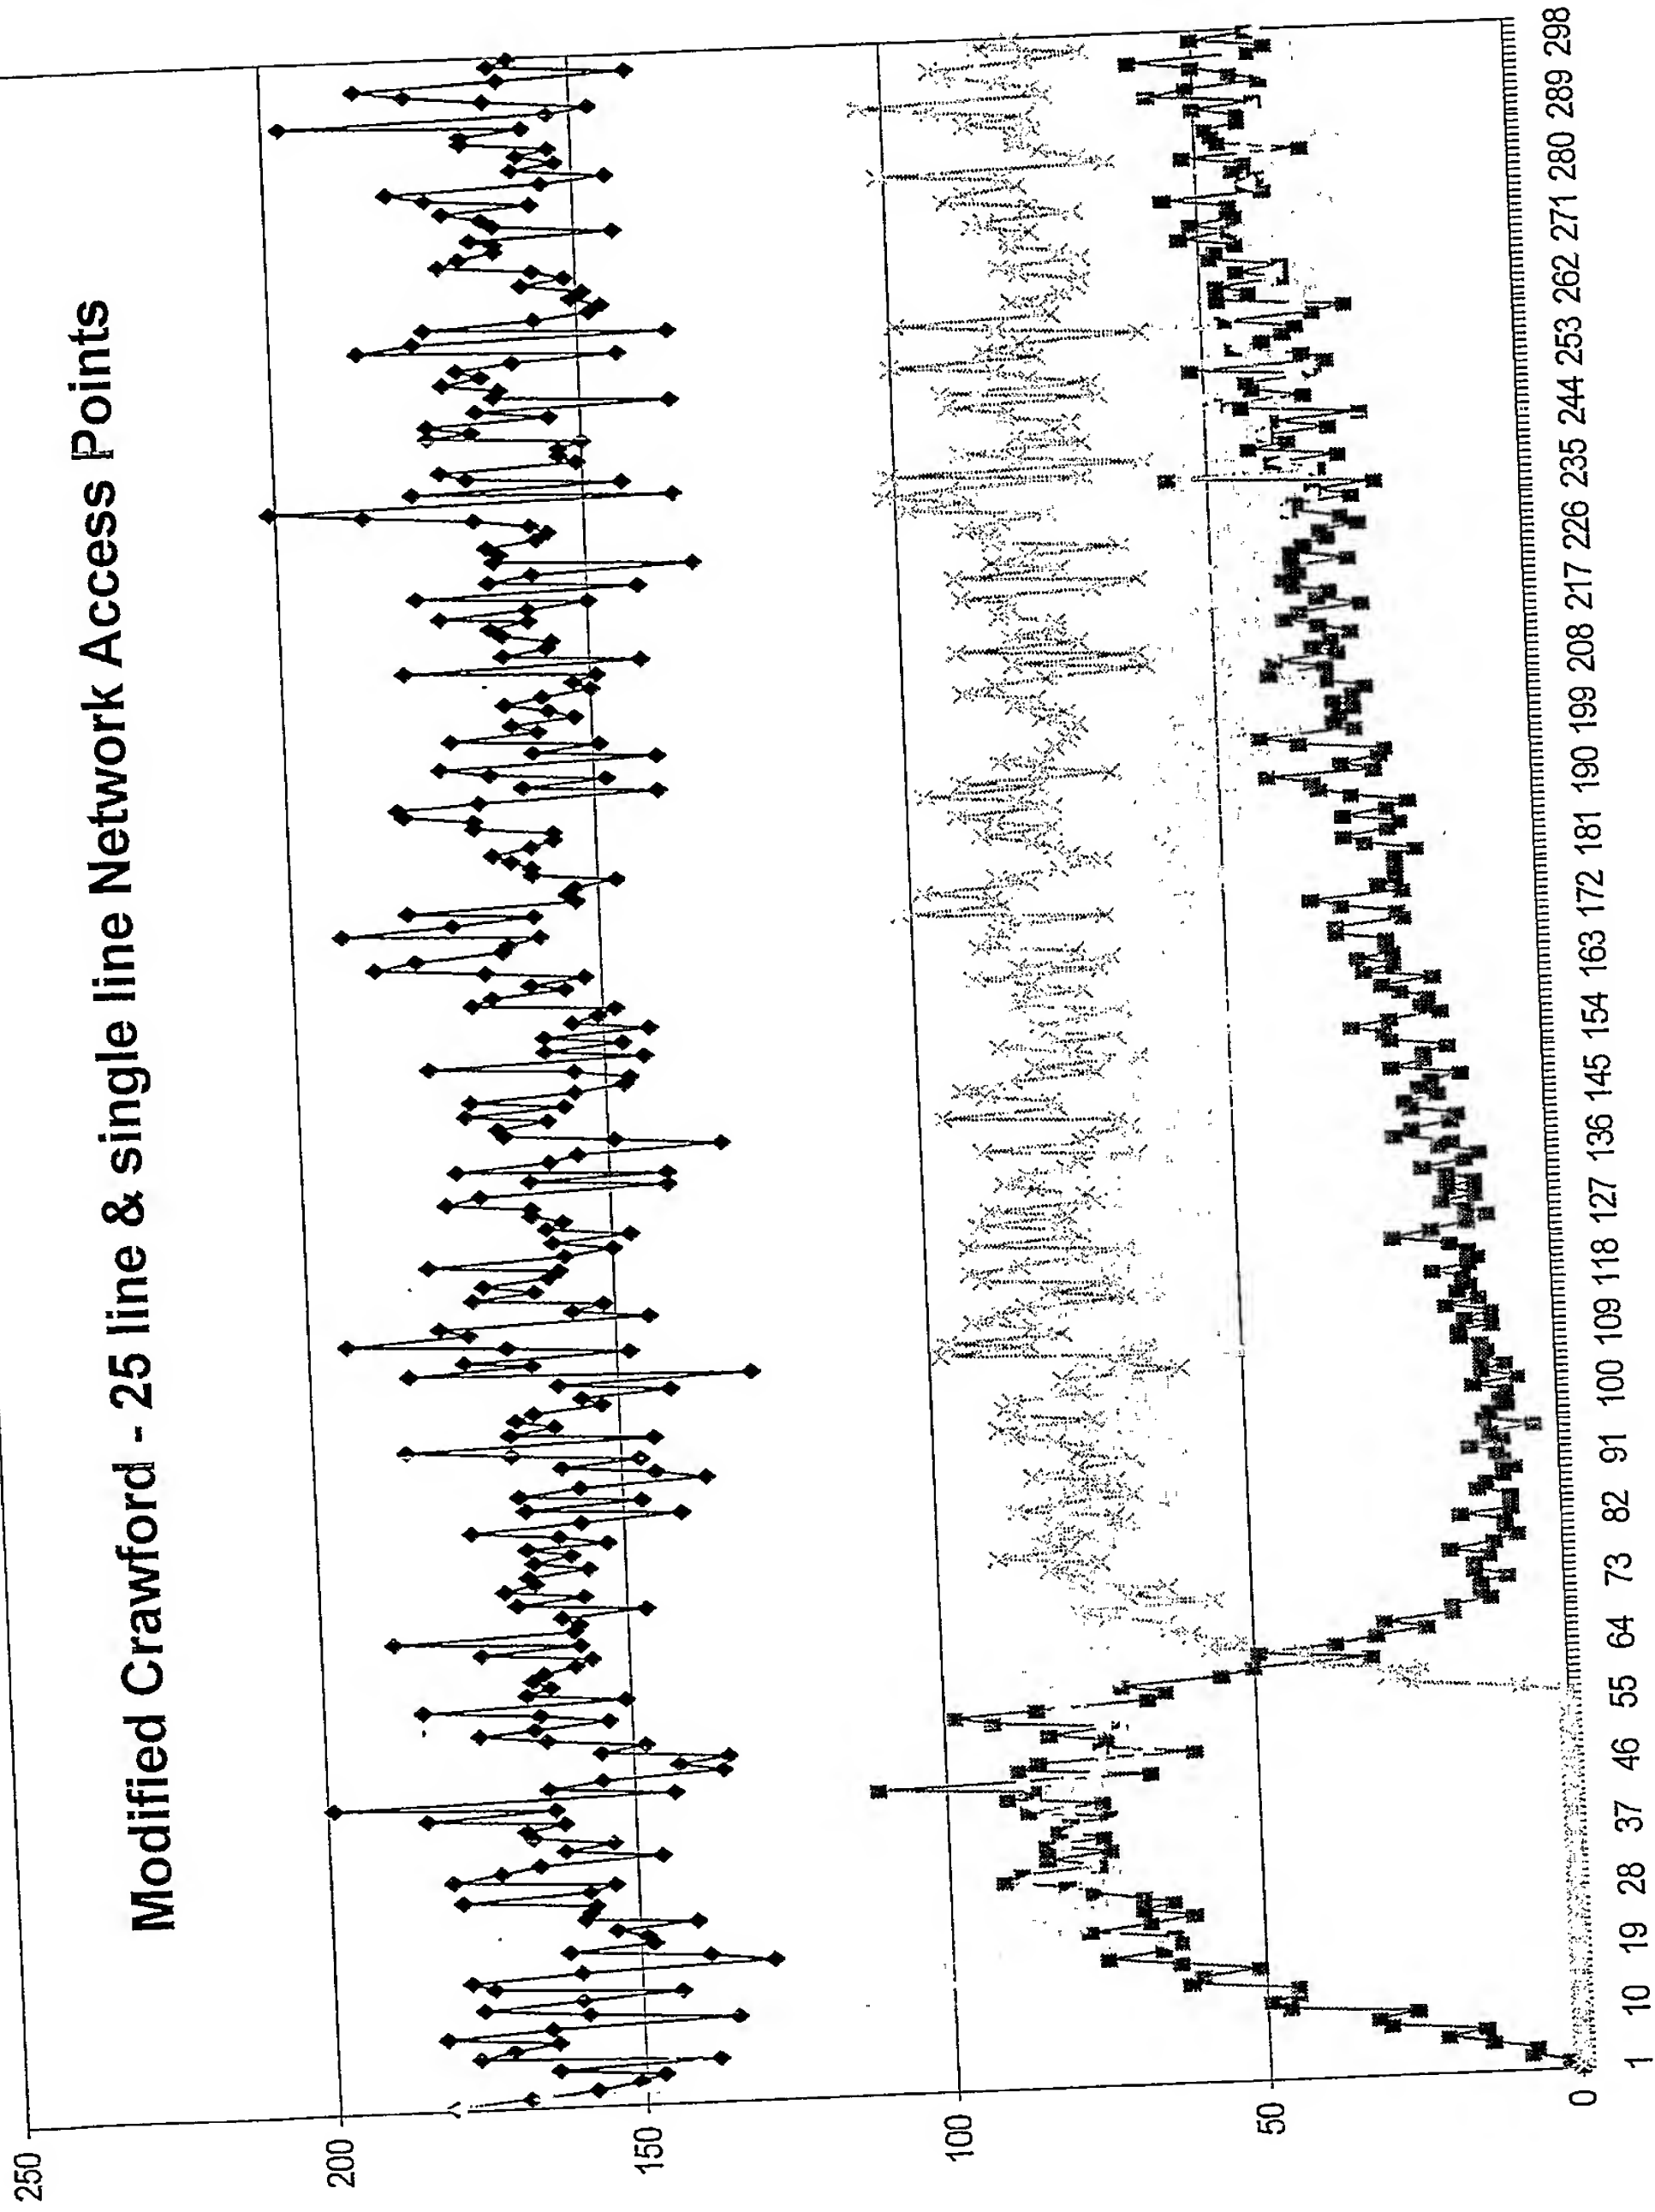


FIGURE 10



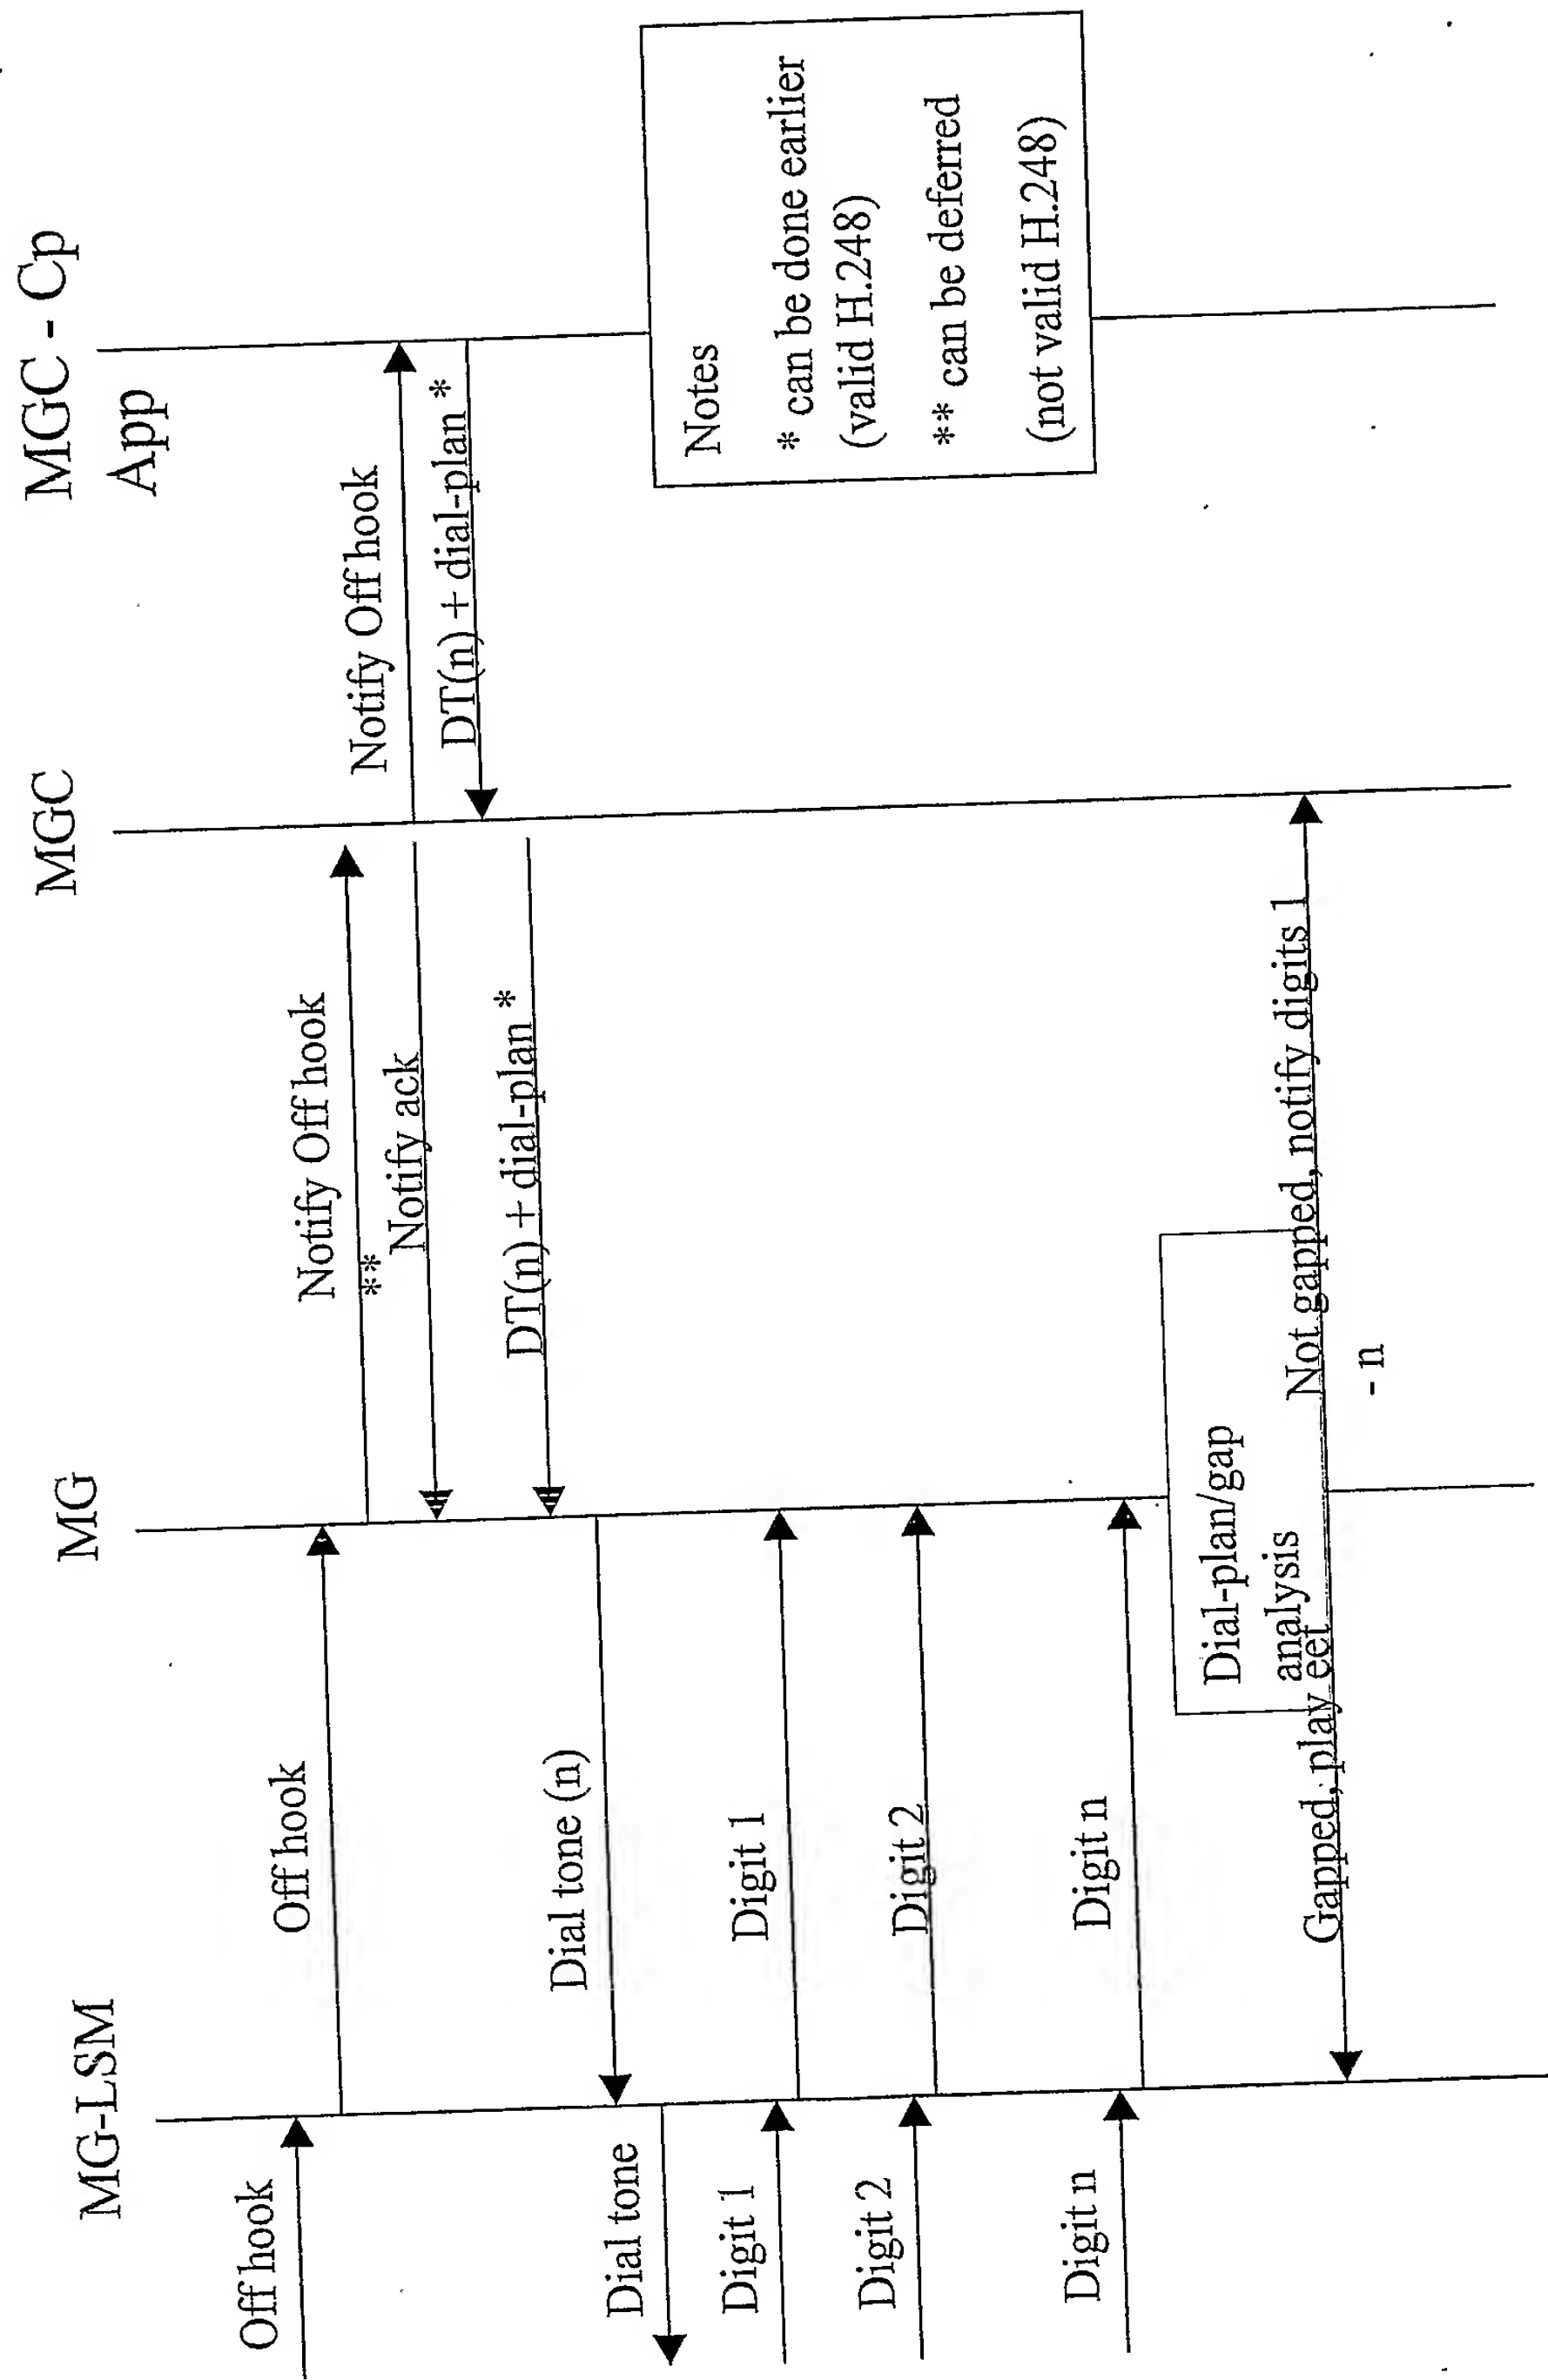


FIGURE 11



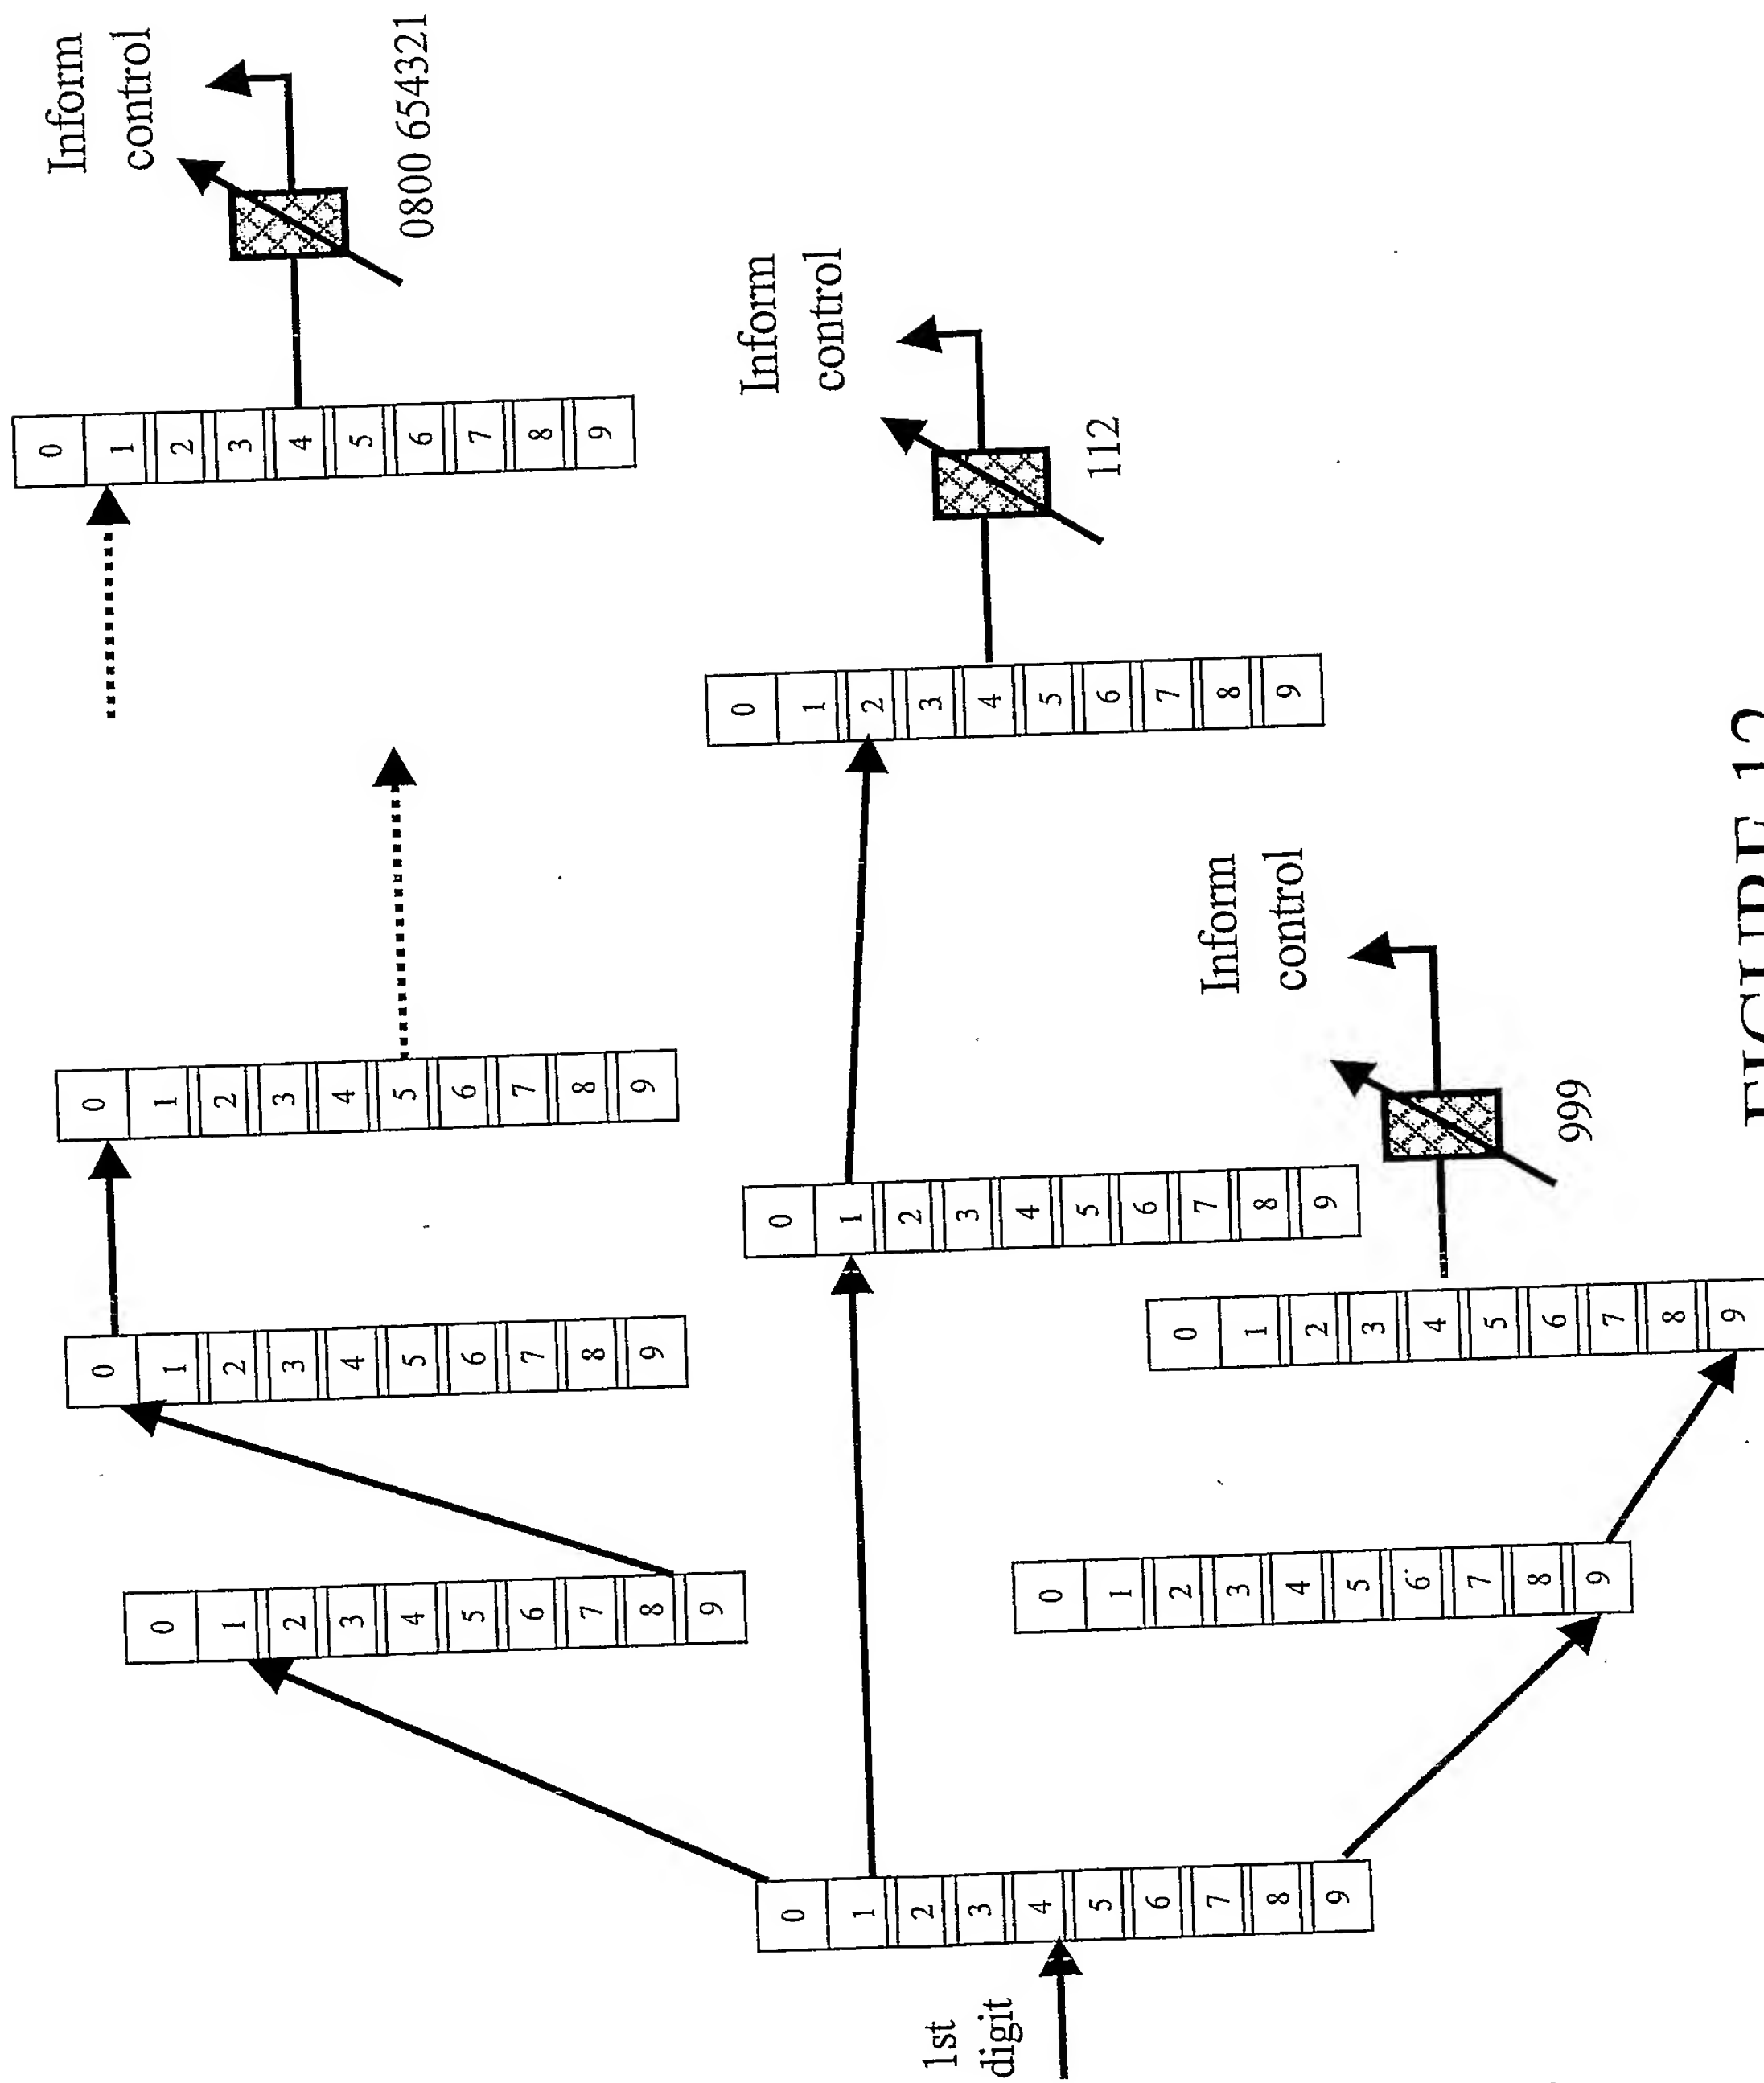


FIGURE 12



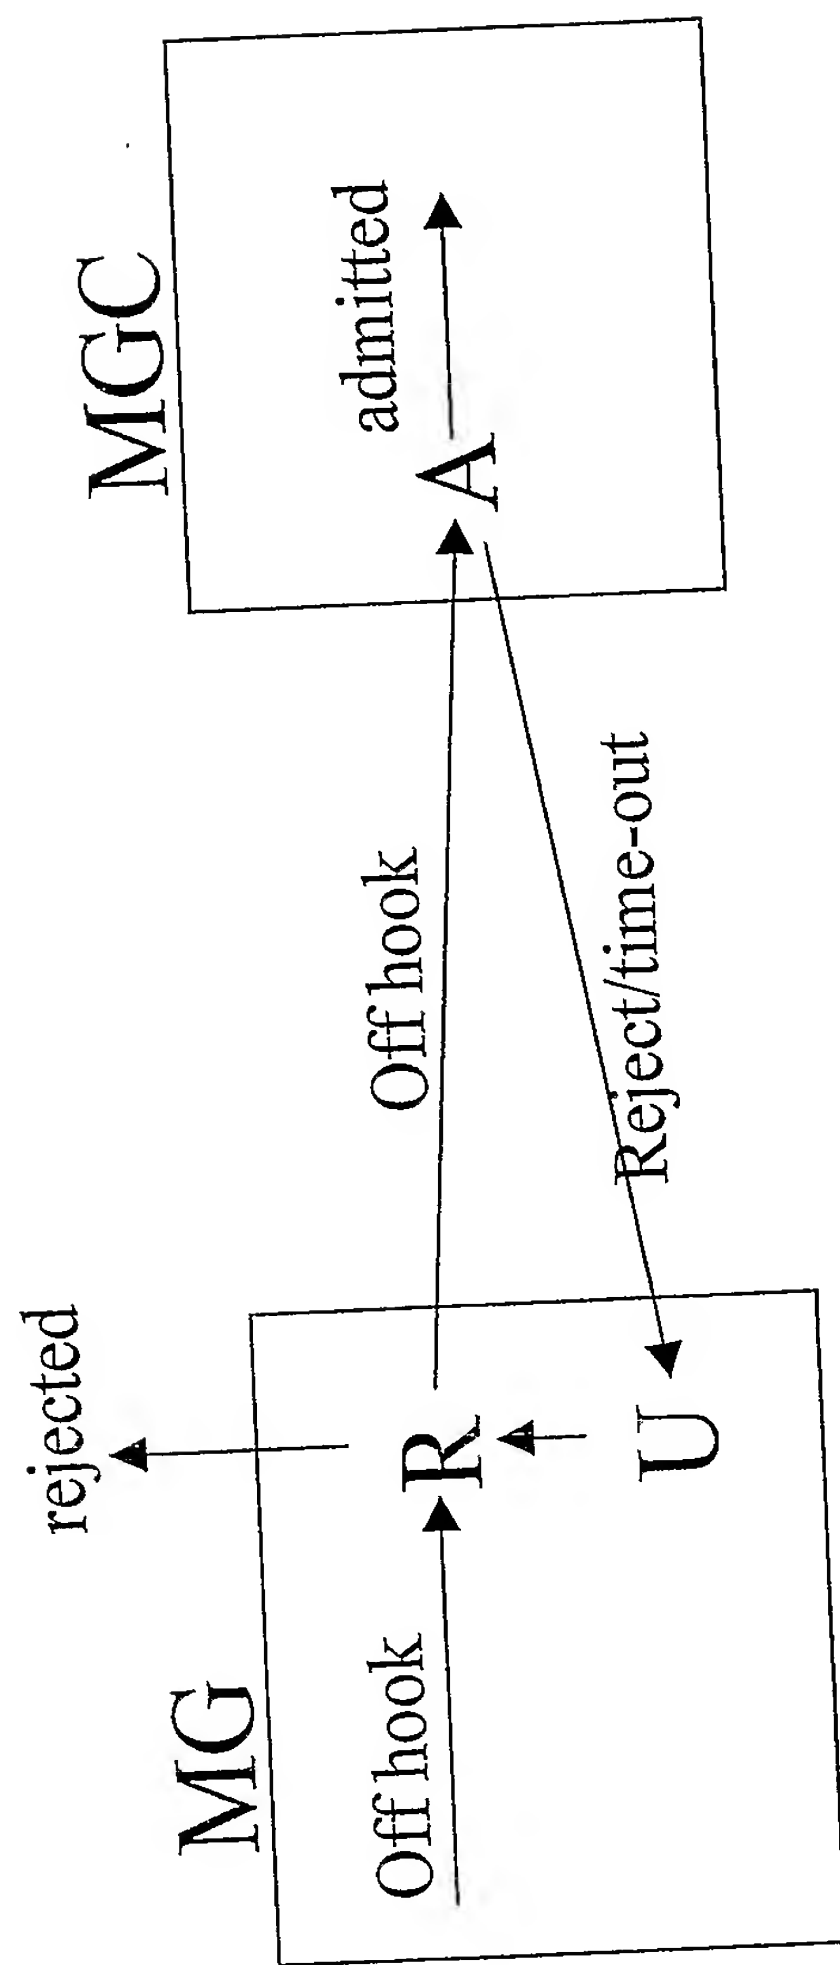


FIGURE 13



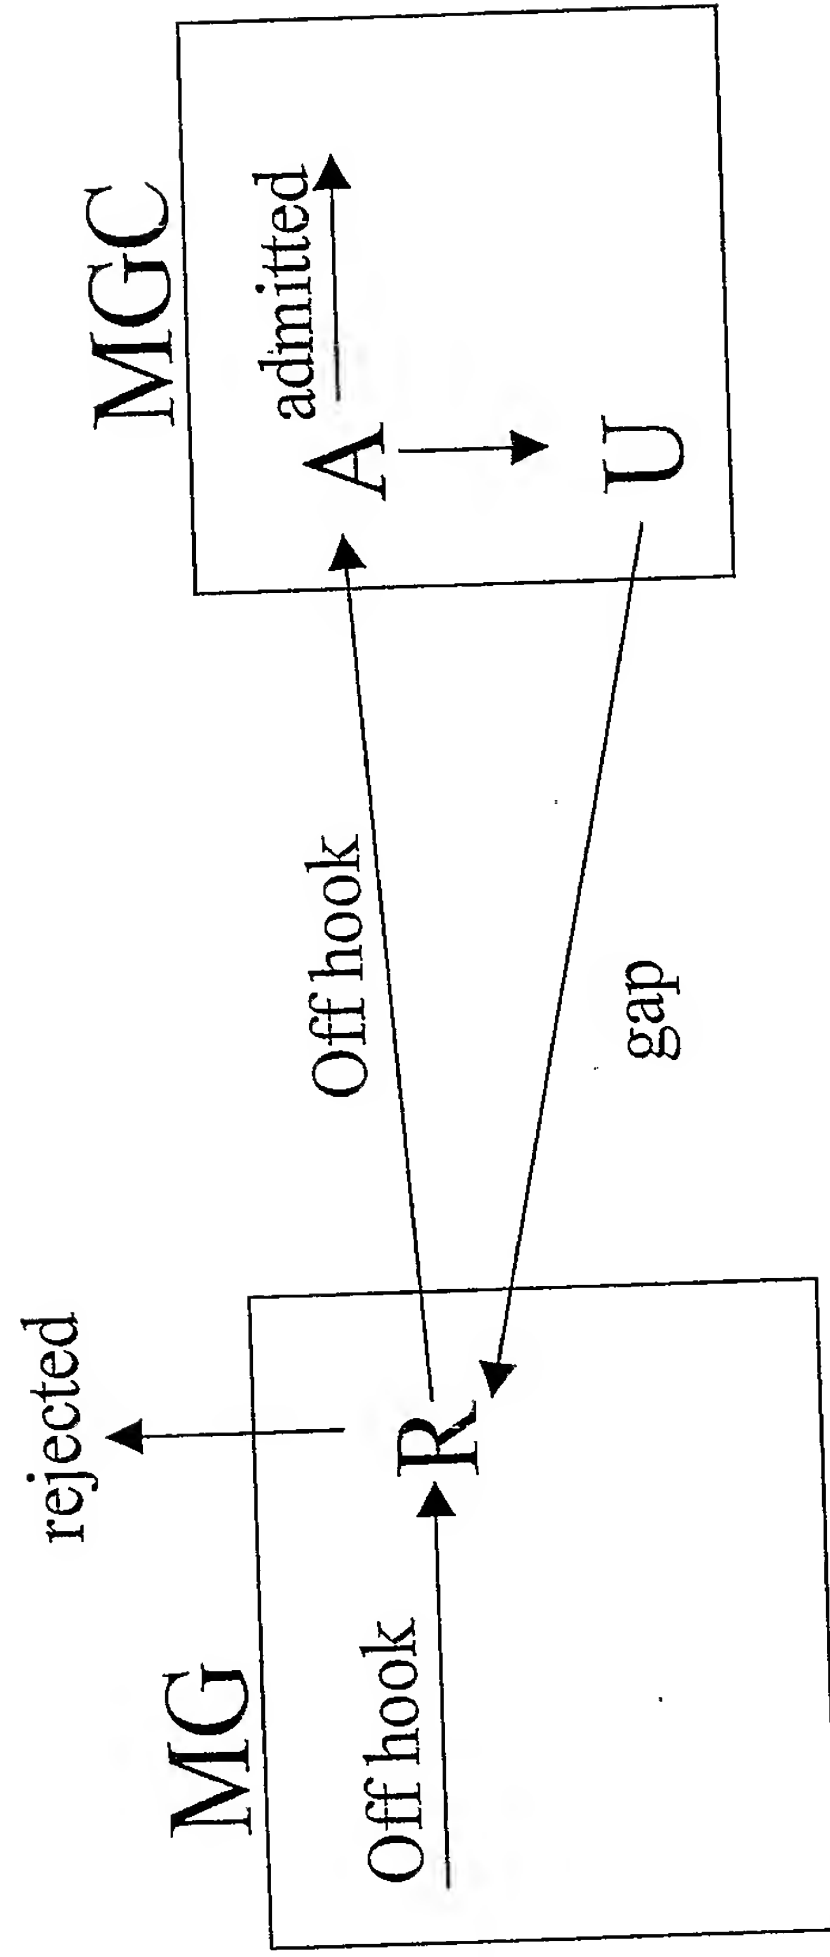


FIGURE 14

12/12/19

